





SMT POWER INDUCTORS

Flat Coils - PG0077 and PG0084 Series





-  **Height:** 6.5mm Max (PG0077) and 4.40mm Max (PG0084)
-  **Footprint:** 14.5mm x 13.0mm Max
-  **Current Rating:** up to 35A
-  **Inductance Range:** 0.38 μ H to 2.65 μ H

Electrical Specifications @ 25°C — Operating Temperature -40°C to +95°C¹


Part ^{8,9} Number	Inductance ² @I _{rated} (μ H TYP)	I _{rated} ³ (A)	DCR (m Ω)		Inductance @0A _{dc} (μ H \pm 20%)	Saturation ⁴ Current I _{sat} (A)	Heating ⁵ Current I _{bc} (A)	Core Loss ⁶ Factor	
			TYP	MAX				K1	K2
PG0077.401	0.38	35	0.75	0.80	0.45	48	35	1.68E-9	33.5
PG0077.801	0.75	31	1.20	1.30	0.80	38	31	1.68E-9	42.5
PG0077.142	1.32	26	2.00	2.10	1.40	28	26	1.68E-9	57.8
PG0077.202	1.90	21	2.80	2.90	2.00	24	21	1.68E-9	67.6
PG0077.282	2.65	17	4.10	4.20	2.80	20	17	1.68E-9	80.1
PG0084.351	0.28	28	1.30	1.80	0.35	40	28	1.27E-9	28.7
PG0084.651	0.52	21.5	2.30	2.80	0.65	32	21.5	1.27E-9	38.1
PG0084.112	0.88	19	3.60	4.20	1.10	24	19	1.27E-9	50.1

Mechanical

Schematic

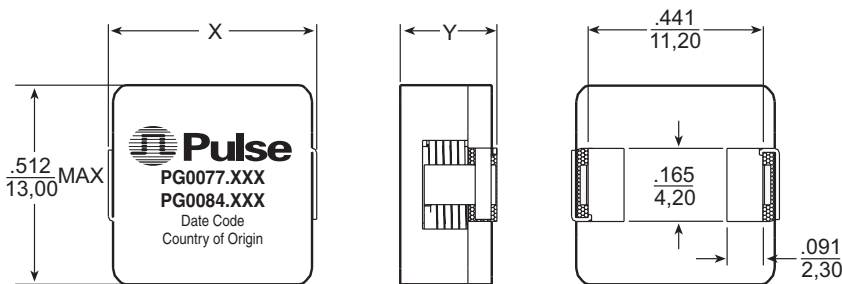


PG0077 **PG0084**
Weight5.5 grams.....3.5 grams
Tape & Reel.....300/reel400/reel

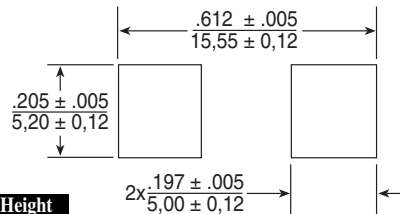

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0.25}$

Part Number	Max. Length "X" (in./mm)	Max. Height "Y" (in./mm)	Max. Height "Z" (in./mm)
PG0077.401	.571/14,50	.256/6,50	.276/7,00
PG0077.801	.571/14,50	.256/6,50	.276/7,00
PG0077.142	.551/14,00	.256/6,50	.276/7,00
PG0077.202	.551/14,00	.256/6,50	.276/7,00
PG0077.282	.551/14,00	.256/6,50	.276/7,00
PG0084.351	.551/14,00	.173/4,40	.173/4,40
PG0084.651	.551/14,00	.173/4,40	.173/4,40
PG0084.112	.543/13,80	.173/4,40	.173/4,40

SUGGESTED PAD LAYOUT

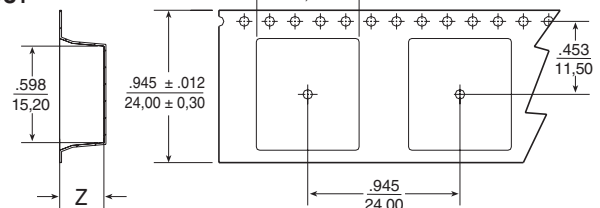

TAPE & REEL LAYOUT

SMT POWER INDUCTORS

Flat Coils - PG0077 and PG0084 Series



Notes from Tables

- The temperature of the component (ambient plus temperature rise) must be within the standard operating temperature range.
- Inductance at I_{rated} is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The saturation current, I_{SAT}, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current, I_{bc}, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:

$$\text{Core Loss} = K1 * (f)^{1.035} * (K2\Delta I)^{2.263}$$
Where: Core Loss = in Watts
f = switching frequency in kHz
K1 & K2 = core loss factors
ΔI = delta I across the component in Ampere
K2ΔI = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100kHz, 0.1VAC.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0077.401 becomes PG0077.401T). Pulse complies to industry standard tape and reel specification EIA481.
- To order RoHS compliant part, add the suffix "NL" to the part number (i.e. PG0077.401 becomes PG0077.401NL and PG0077.401T becomes PG0077.401NLT).

Inductance vs Current Characteristics

