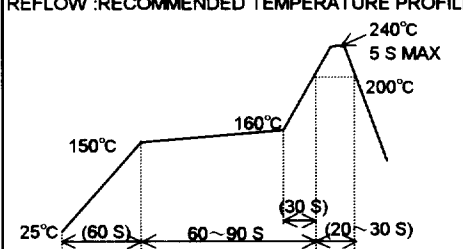


△	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	△	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△						△					
△						△					
APPLICATION STANDARD											
RATING	OPERATING TEMPERATURE RANGE		-55 °C TO 85 °C			STORAGE TEMPERATURE RANGE		-10 °C TO 60 °C			
	VOLTAGE		AC 50 V			OPERATING HUMIDITY RANGE		RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)			
	CURRENT		0.3 A								
SPECIFICATIONS											
ITEM		TEST METHOD				REQUIREMENT				QT	AT
CONSTRUCTION											
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT				ACCORDING TO DRAWING				X	X
MARKING		CONFIRMED VISUALLY.								X	X
ELECTRICAL CHARACTERISTICS											
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).				70 mΩ MAX.				X	X
INSULATION RESISTANCE		100 V DC.				100 MΩ MIN.				X	—
VOLTAGE PROOF		150 V AC FOR 1 min.				NO FLASHOVER OR BREAKDOWN.				X	X
MECHANICAL CHARACTERISTICS											
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.				INSERTION FORCE: 48 N MAX. WITHDRAWAL FORCE: 2 N MIN.				X	—
MECHANICAL OPERATION		50 TIMES INSERTION AND EXTRACTIONS.				1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	—
VIBRATION		FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, — m/s ² AT 10 CYCLES FOR 3 DIRECTIONS.				1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	—
SHOCK		490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.								X	—
ENVIRONMENTAL CHARACTERISTICS											
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C. 90~95 %. 96 h.				1) CONTACT RESISTANCE: 80 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN.				X	—
RAPID CHAGE OF TEMPERTURE		TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.				3) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	—
DRY HEAT		EXPOSED AT 85 °C. 96 h.				1) CONTACT RESISTANCE: 80 mΩ MAX.				X	—
COLD		EXPOSED AT -55 °C. 96 h.				2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	—
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.				NO HEAVY CORROSION.				X	—
SULPHUR DIOXIDE		EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)				1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO HEAVY CORROSION.				X	—
RESISTANCE TO SOLDERING HEAT		REFLOW : RECOMMENDED TEMPERATURE PROFILE  25°C (60 S) 150°C 160°C (30 S) (20~30 S) 240°C 5 S MAX 200°C				NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.				X	—
SOLDERABILITY		SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.				NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.				X	—
REMARKS					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
					<i>J. Matsukawa</i>	<i>J. Matsukawa</i>	<i>H. Okawa</i>	<i>T. Yoshimura</i>			
UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.					00.06.20	00.06.20	00.06.21	00.06.23			
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST											
HRS HIROSE ELECTRIC CO., LTD.				SPECIFICATION SHEET				PART NO. FX11A - 80P - SV0.5 (21)			
CODE NO. (OLD)			DRAWING NO.			CODE NO.			1		
CL			ELC4 - 152626 - 01			CL 573 - 0648 - 5 - 21			1		

Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

TO
PCK