


TERMINAL BLOCKS

SRSL 4-T32

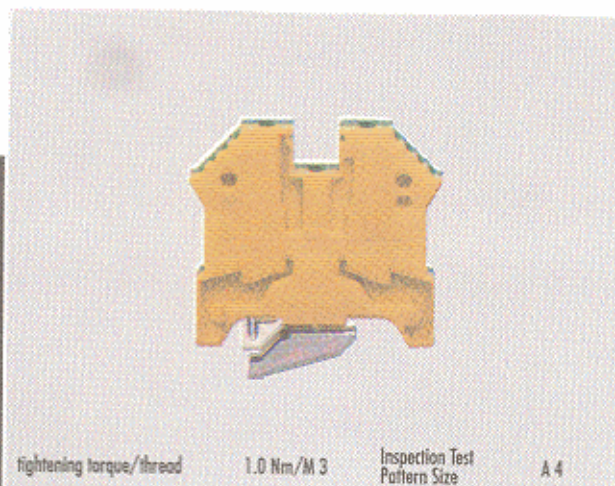

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
SRSL 4-T32	41065.2	green/yellow	100


Ratings:

Dimensions	TS 32
LxBxH (mm)	56x8x52
Stripped Length	12 mm

Max Rated Cross Section

Single Wire (solid)	0.2-6 mm ²
Stranded Wire (flexible)	0.2-4 mm ²
Wire Size	AWG 22-10

SRSL 10-T32

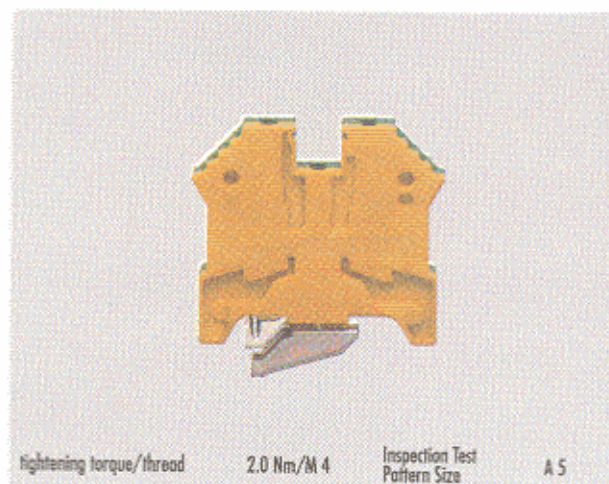

tightening torque/thread	2.0 Nm/M 4	Inspection Test Pattern Size	A 5
Type	Cat.-No.	Qty.p.pck.	
SRSL 10-T32	41066.2	green/yellow	80


Ratings:

Dimensions	TS 32
LxBxH (mm)	56x10x52
Stripped Length	12 mm

Max Rated Cross Section

Single Wire (solid)	0.2-10 mm ²
Stranded Wire (flexible)	0.2-10 mm ²
Wire Size	AWG 20-8

SRSL 2.5-T35

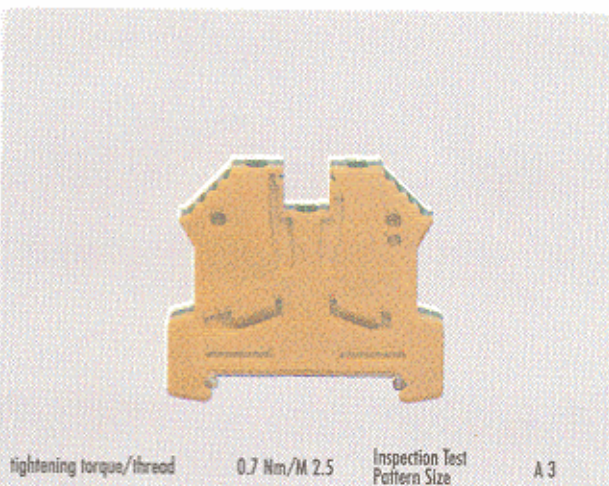

tightening torque/thread	0.7 Nm/M 2.5	Inspection Test Pattern Size	A 3
Type	Cat.-No.	Qty.p.pck.	
SRSL 2.5-T35	41056.2	green/yellow	100


Ratings:

Dimensions	TS 35
LxBxH (mm)	52x6x47
Stripped Length	10 mm

Max Rated Cross Section

Single Wire (solid)	0.2-4 mm ²
Stranded Wire (flexible)	0.2-2.5 mm ²
Wire Size	AWG 22-14

SRSL 4-T35

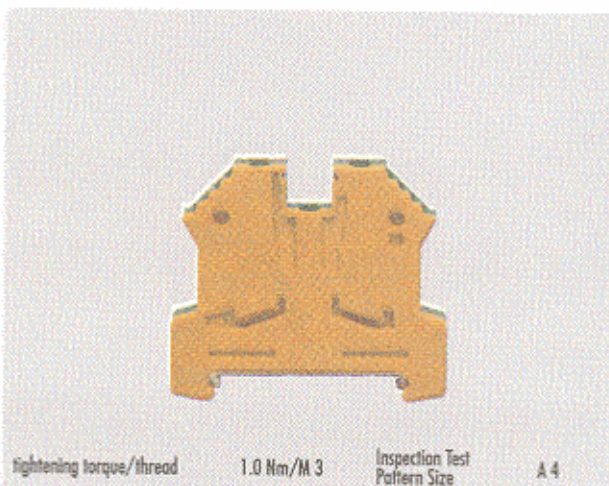

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
SRSL 4-T35	41212.2	green/yellow	100

Ratings:

Dimensions	TS 35
LxBxH (mm)	56x8x47
Stripped Length	12 mm

Max Rated Cross Section

Single Wire (solid)	0.2-6 mm ²
Stranded Wire (flexible)	0.2-4 mm ²
Wire Size	AWG 22-10