

1

2

3

4

5

TECHNICAL CHARACTERISTICS

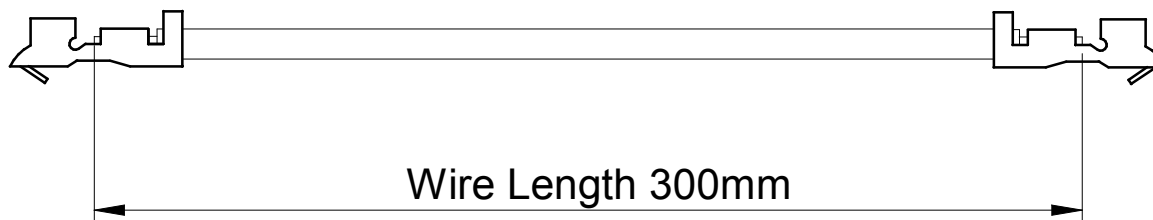
MATERIAL
 COLOR: BLACK
 STYLE: UL1061

ENVIRONMENTAL
 OPERATING TEMPERATURE: -20°C UP TO 80°C
 COMPLIANCE: LEAD FREE AND ROHS

WIRE DIMENSION
 AWG: 28

PACKAGING
 10 PCS/BAG

Wire end A





Wire end B

Wire Length 300mm

| | |
|------------|-------------|
| Wire end A | 64800113722 |
| Wire end B | 64800113722 |

RoHS Compliant

| | | | | | | | |
|-----|-----------|------|----|--|---|---|-------------------|
| G | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | |
| F | | | | | | | |
| E | | | | | | | |
| D | | | | | | | |
| C | | | | APPROVAL: BBu | UNIT: MM | DESCRIPTION: WR-WTB 1.50 MM PRE-CRIMPED CONTACT | SIZE A4 |
| B | | | | | SCALE: | | |
| A | 12-OCT-15 | PDF | AK | | SHEET: 1/3 | WERI PART NO: 648 148 128 130 | |
| REV | DATE | FILE | BY | | DRAW: QL | | |

1

2

3

4

5

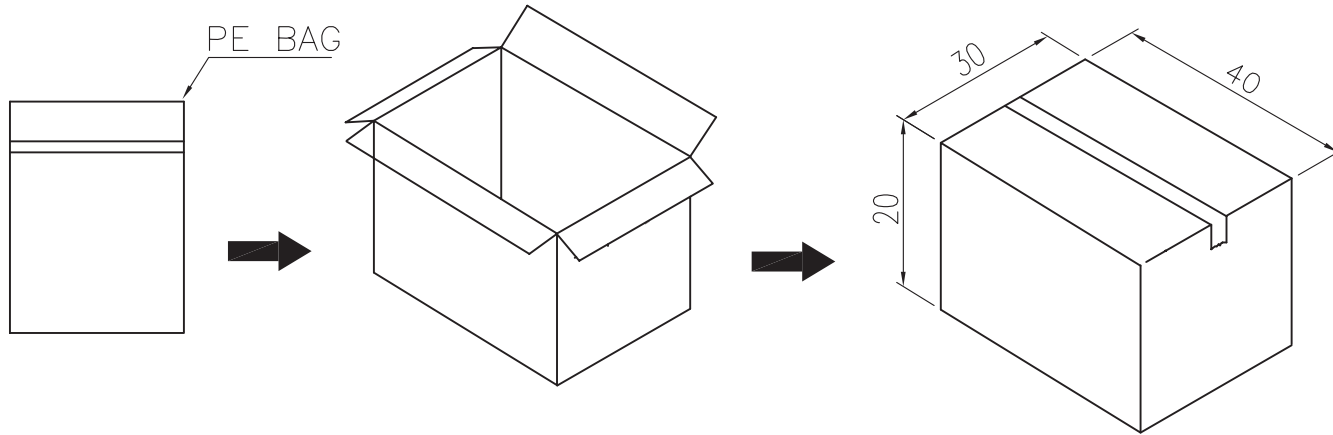
A



B

C

D

Note:
 1.Dimension
 Carton Size:40*30*20(CM)
 2.Quantity: 5000 Pcs/Carton



| | | | | | | | | |
|----------------|------|------|---------------|--|---|---|--|-------------------|
| RoHS Compliant | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | DESCRIPTION: WR-WTB 1.50MM PRE-CRIMPED CONTACT | SIZE A4 |
| G | | | | | | | | |
| F | | | | | | | | |
| E | | | | | | | | |
| D | | | | | | | | |
| C | | | APPROVAL: BBu | UNIT: MM | WERI PART NO: 648 148 128 130 | | | |
| B | | | | SCALE: | | | | |
| A | | | | SHEET: 2/3 | | | | |
| REV | DATE | FILE | BY | DRAW: QL | | | | |

1

2

3

4

5

Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

A

B

C

RoHS Compliant

| | | | | | | | |
|-----|-----------|------|----|--|---|---|-------------------|
| G | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | |
| F | | | | | | | |
| E | | | | | | | |
| D | | | | | | | |
| C | | | | APPROVAL: JC | UNIT: MM | DESCRIPTION: DISCLAIMER | SIZE A4 |
| B | | | | | SCALE: | | |
| A | 10-SEP-14 | PDF | QL | | SHEET: 3/3 | WERI PART NO: DISCLAIMER | |
| REV | DATE | FILE | BY | | DRAW: QL | | |

D