

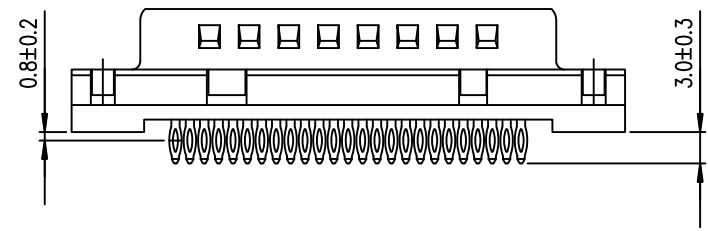
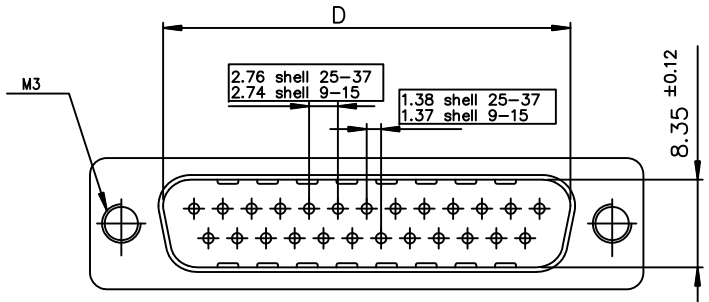


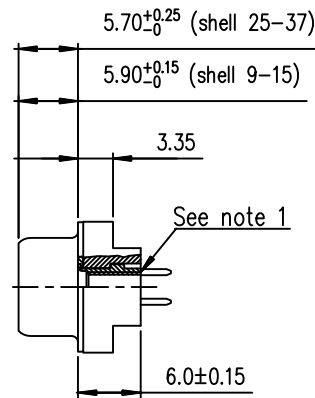


FCIconnect.com

Copyright FCI

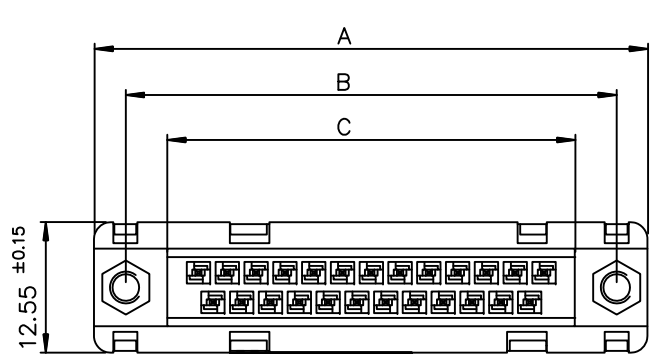

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

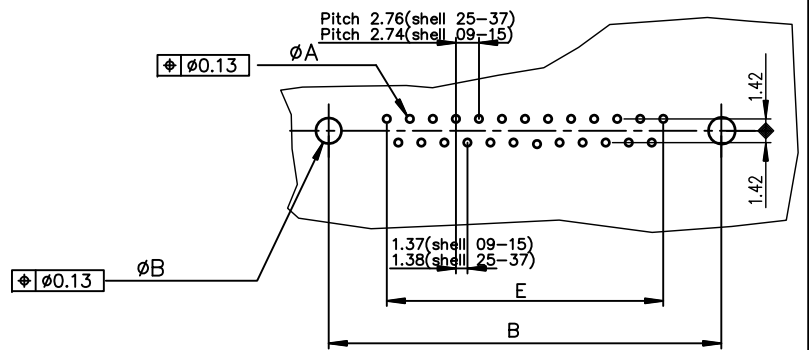

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6±0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P91C4PL00LF	D09P91C6PL00LF	D09P91C8PL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P91C4PL00LF	D15P91C6PL00LF	D15P91C8PL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P91C4PL00LF	D25P91C6PL00LF	D25P91C8PL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P91C4PL00LF	D37P91C6PL00LF	D37P91C8PL00LF
						gold flash	0.76µ gold	1.25µ gold

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406 ISO 1101		D-SUB		D-SUB	
Ltr		ecn no		dr		date		title	
L		ELX-I-21256		AB		2015/07/14		MALE CONNECTOR DELTA-D STRAIGHT - PRESS FIT	
		angles		linear		MM		dwg no	
		0±2'		.0±0.1		scale 2:1		sheet 1 of 1	
				.00±0.1				size	
				.000±0.1				A3	
		dr		JARRY		1992/09/14		type	
		enr		ALIAS BABU		2015/07/14		Product Customer Drawing	
		chr		MITHUN PAUL		2015/07/14			
		app		BIJU K PAUL		2015/07/14			
sheet index		revision		L					
		sheet		1					