

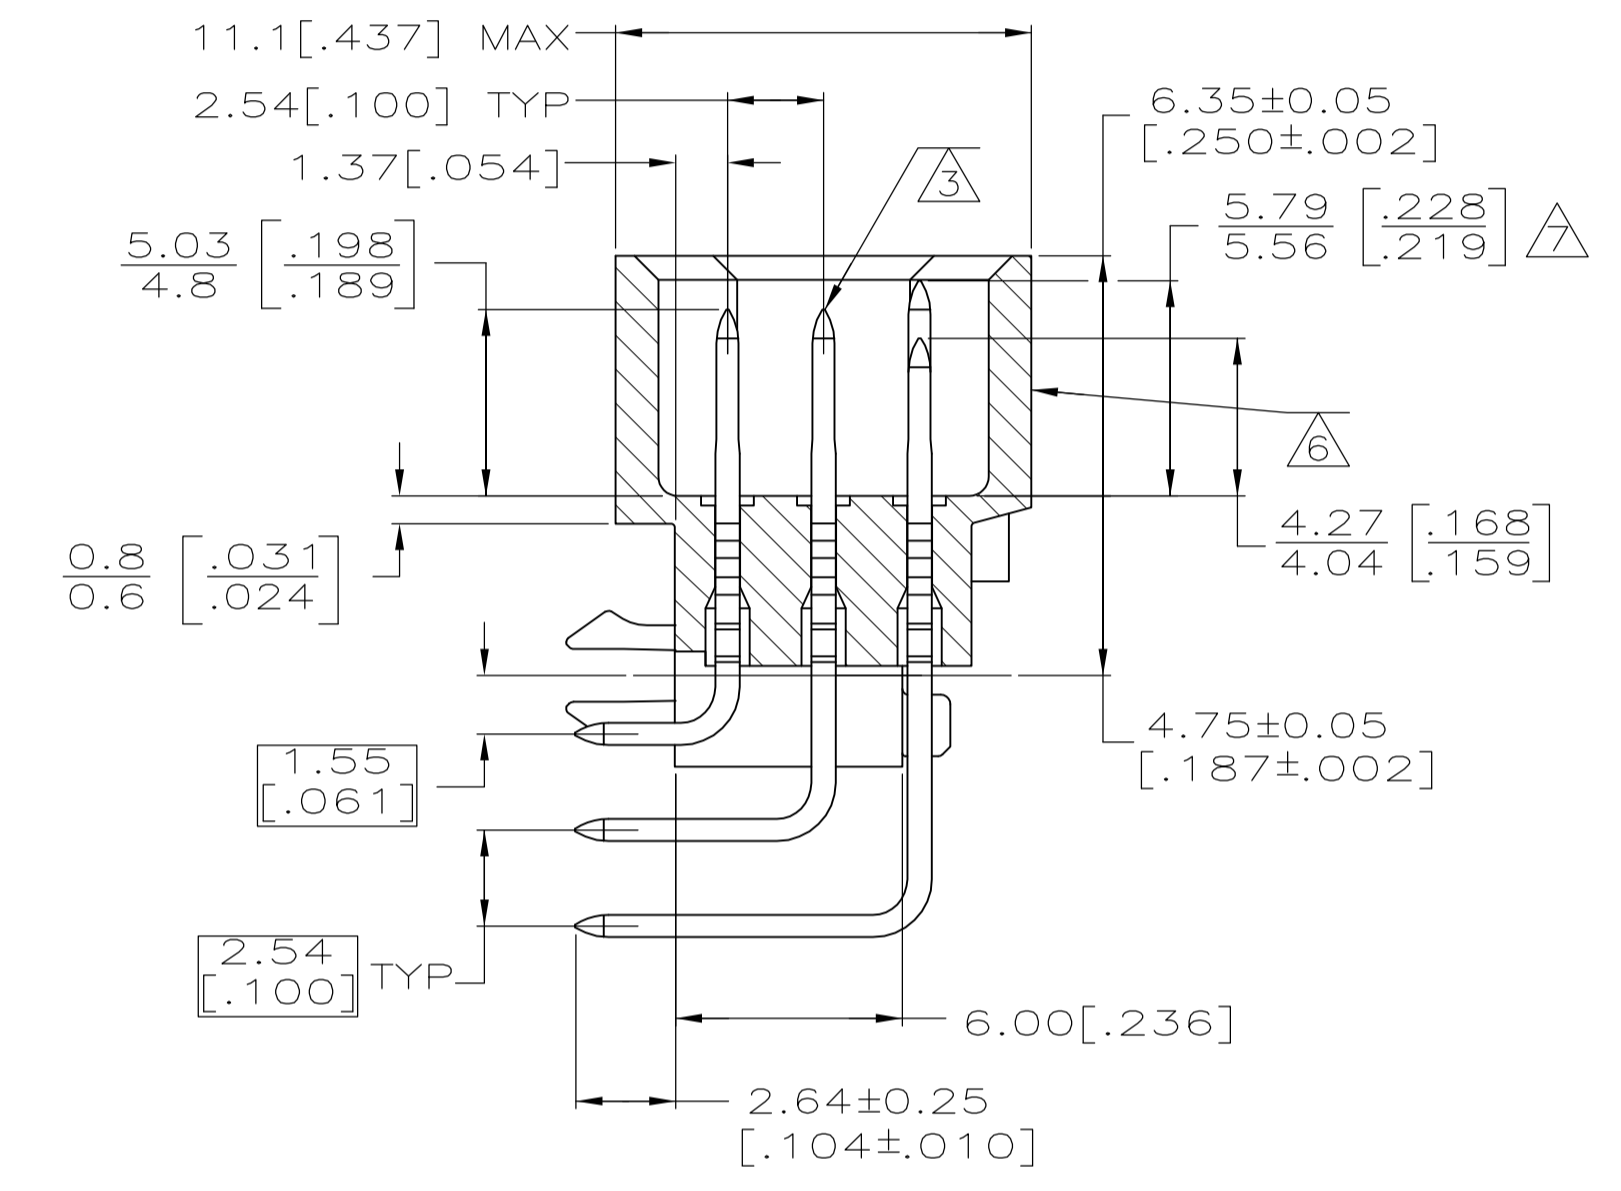
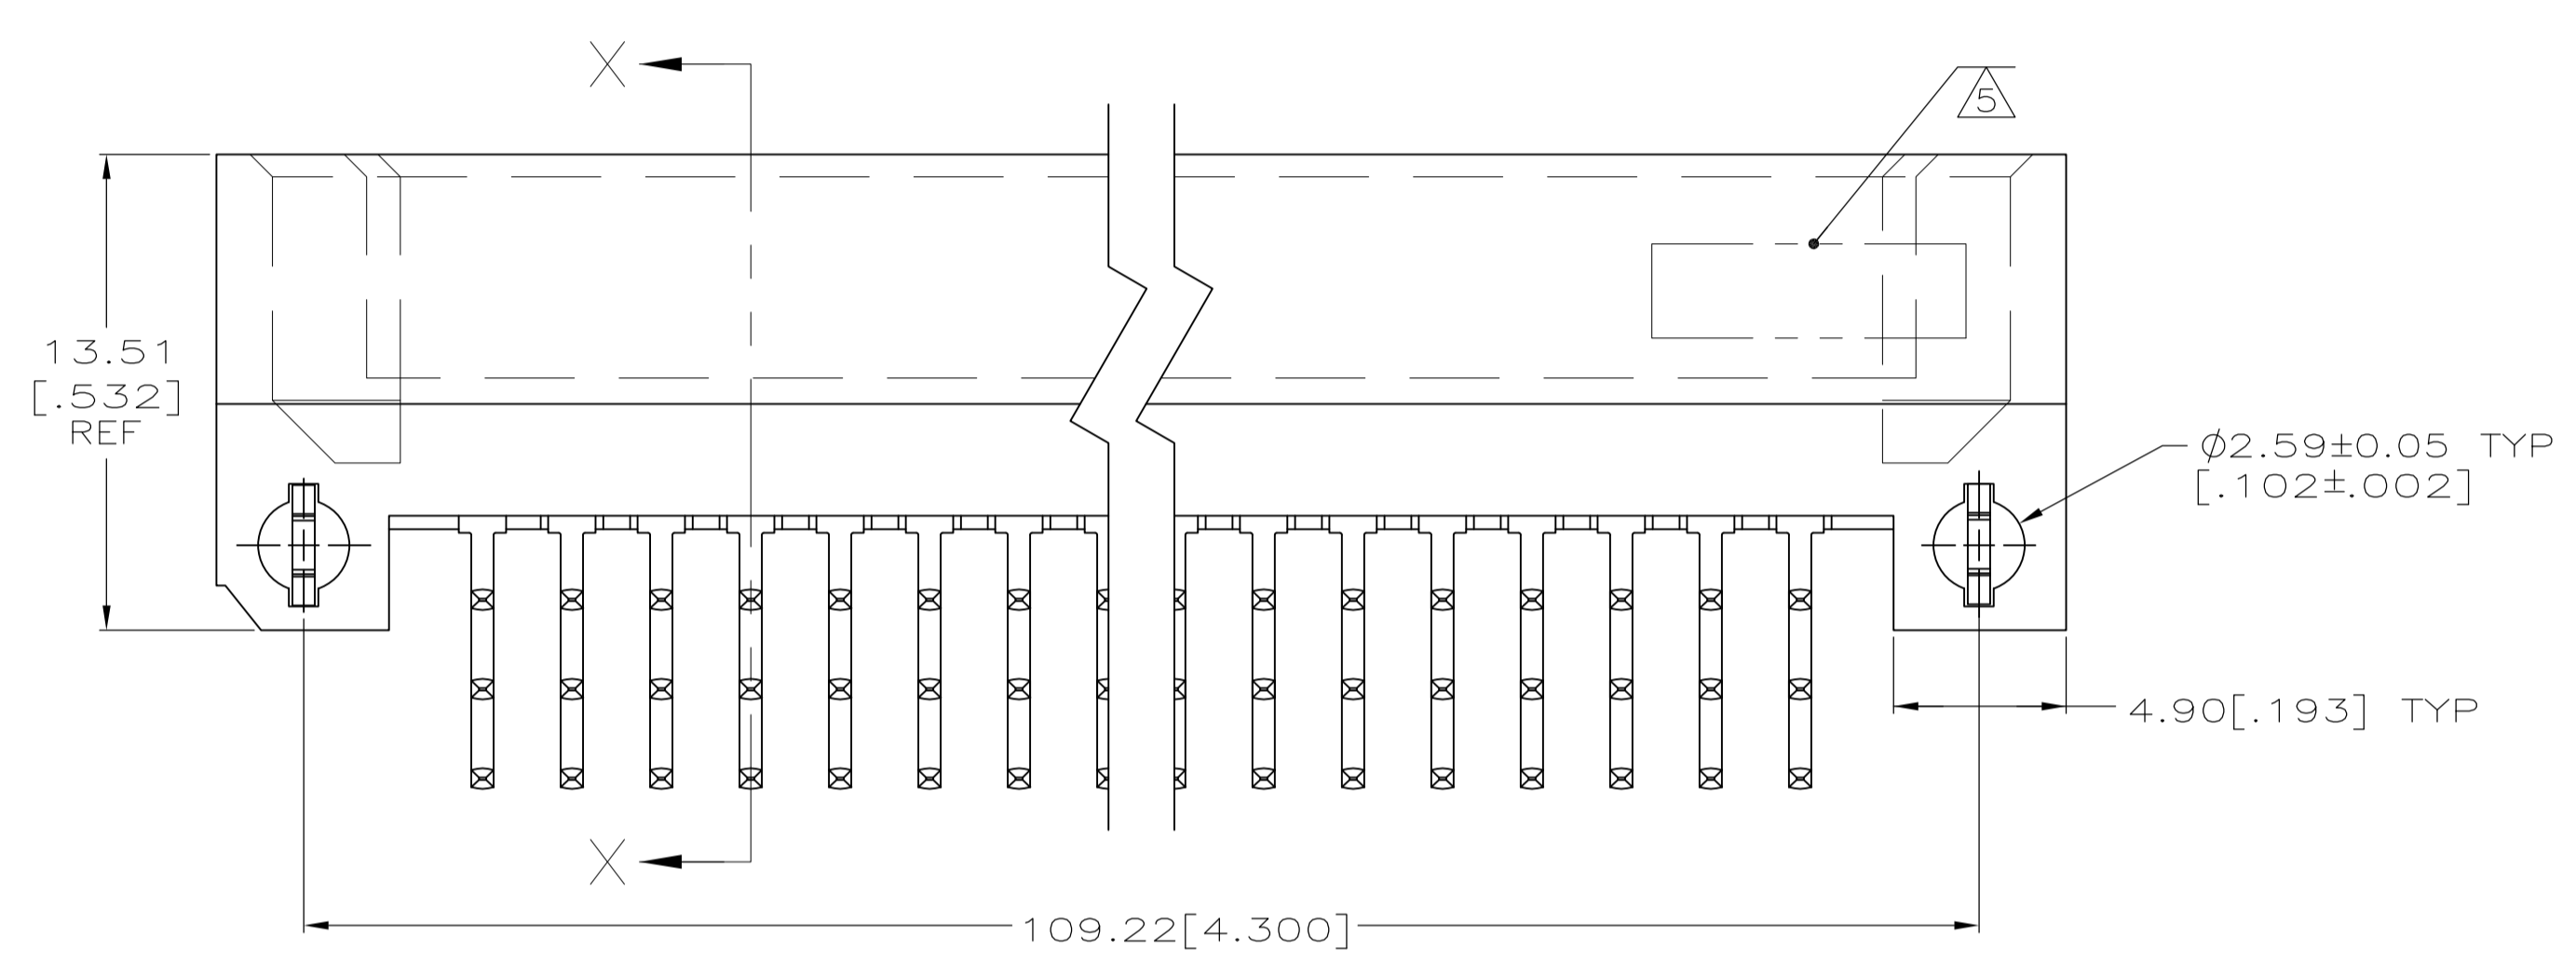


- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 5 [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.
- 6 MARKING ON THIS SIDE.
- 7 THE 5.69[.224] LONG MAKE FIRST POSTS EXCEED THE ALIGNMENT CAPABILITY OF THE HOUSING AND COULD POSSIBLY STUB DURING MATING. CUSTOMERS MUST TAKE THIS INTO CONSIDERATION IN CARD CAGE DESIGN.

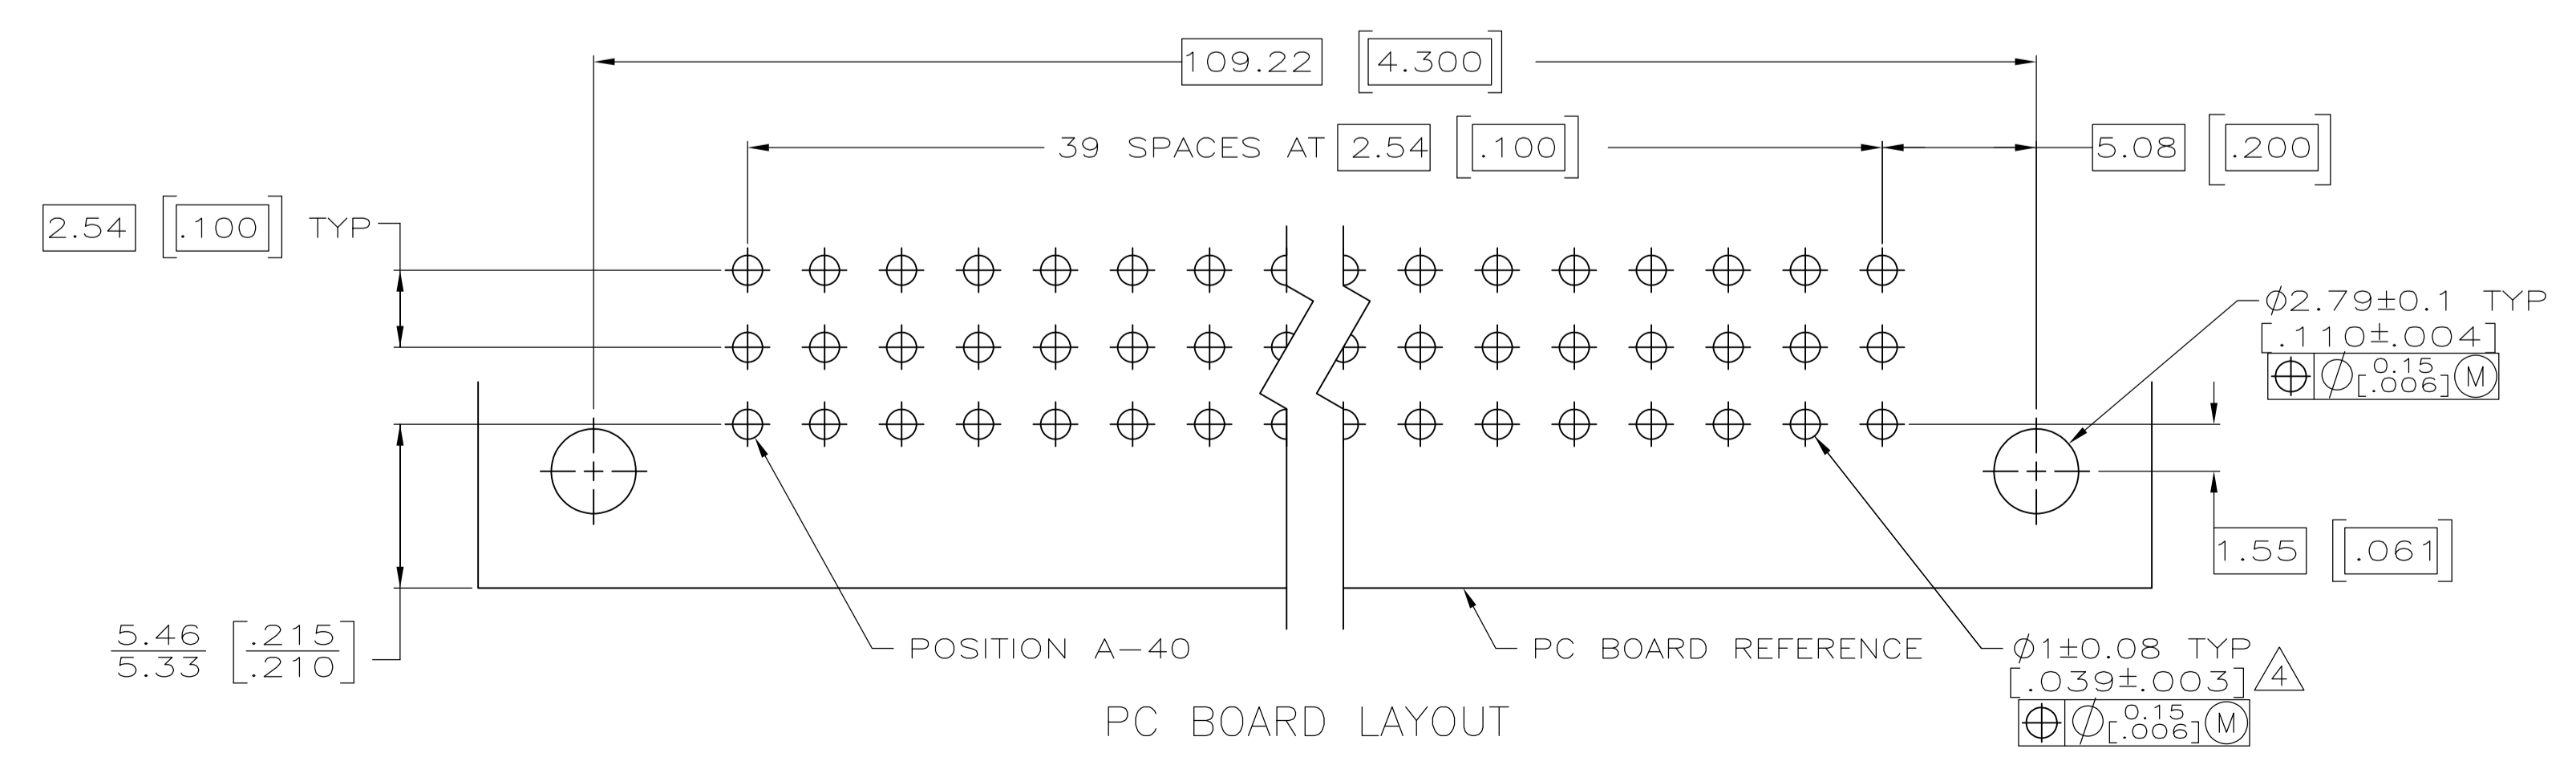

SECTION X-X

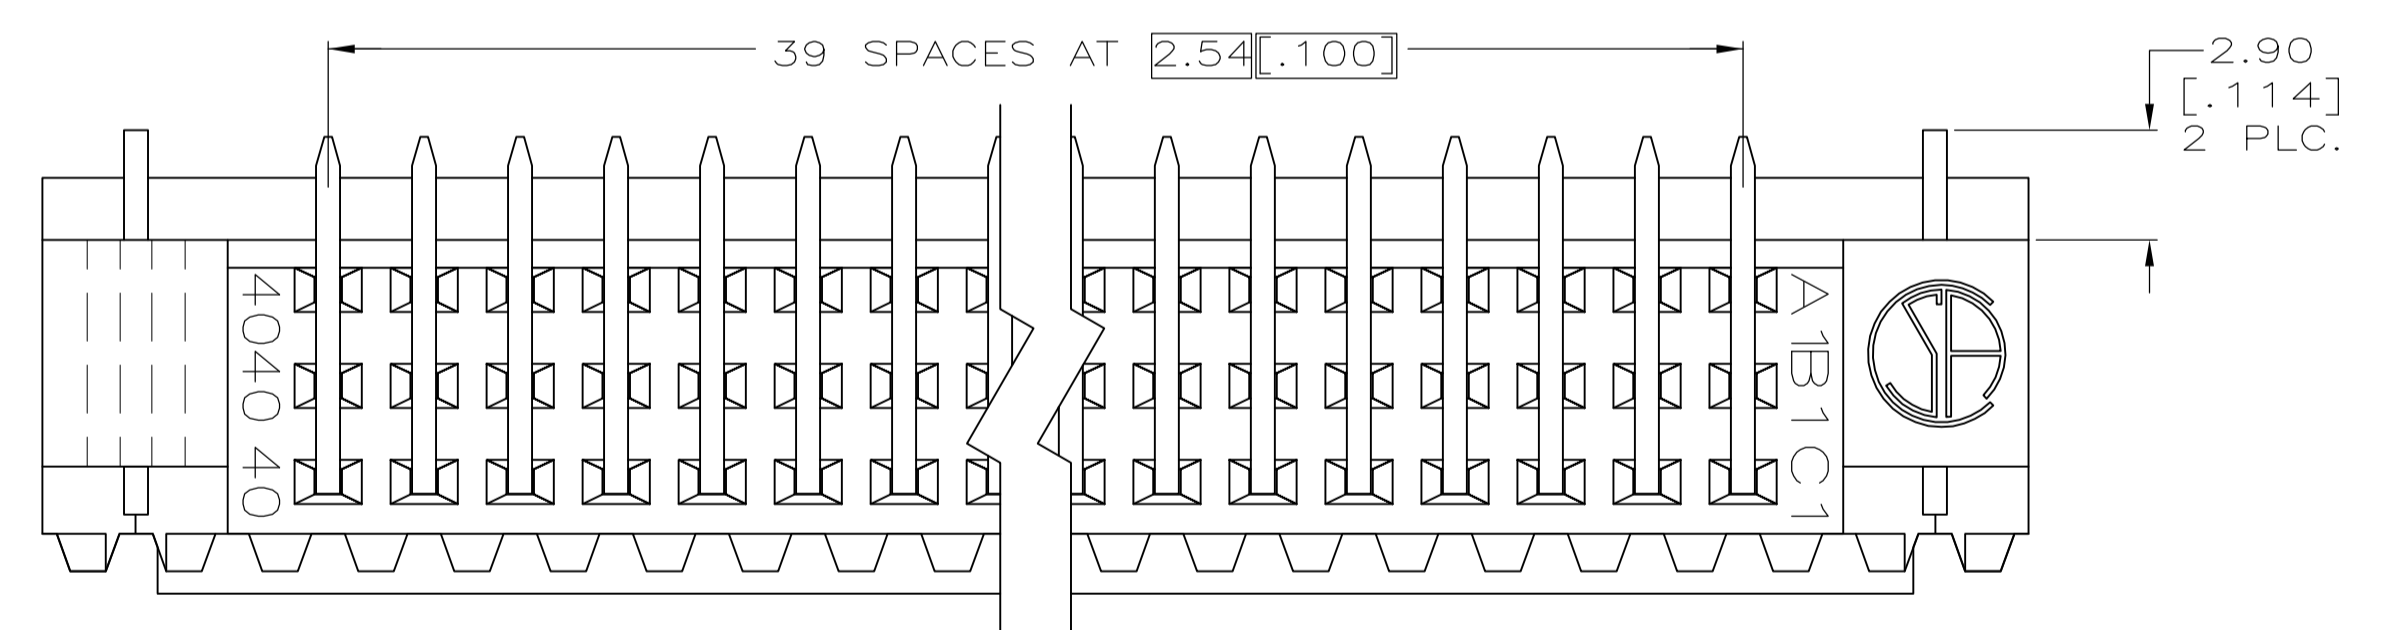

1,7,13,19,28,31,36,40	2-6,8-12,14-18,20-27 29,30,32-34,37-39	35	C	40	5148516-1
3,9,15,21,27,33,39	1,2,4-8,10-14,16-20, 22-26,28-32,34-38,40	NONE	B	40	
2,5,8,11,23,29,35	1,3,4,6,7,9,10,12-22, 24-28,30-34,36-40	NONE	A	40	
POSITIONS LOADED WITH 5.69[.224] CONTACTS	POSITIONS LOADED WITH 4.93[.194] CONTACTS	POSITIONS LOADED WITH 4.16[.164] CONTACTS	ROWS	NO. OF LOADED POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE OSMAYOS	Tyco Electronics Corporation Harrisburg, PA 17105-3608
0 PLC ± -	1 PLC ± -	OSMAYOS	
2 PLC ± 0.13[.005]	3 PLC ± -	OSMAYOS	
4 PLC ± -	ANGLES ± -		
MATERIAL	FINISH	APVD A. SHARPE OSMAYOS	NAME ASSEMBLY, PIN, EUROCARD, TYPE C, 120 POSN., 2.64[.104] SOLDER POST, MFBL, GUIDE FEATURES, REVERSE POLARIZATION, BOARDLOCKS
		SIZE A1	CAGE CODE DRAWING NO. 00779
		WEIGHT	SCALE 5:1
		CUSTOMER DRAWING	SHEET 1 OF 1 REV 01