




| DATE     | SYM | REVISION RECORD        | AUTH | DR.  | CK. |
|----------|-----|------------------------|------|------|-----|
| 10/12/07 | A   | ADDED "ROHS COMPLIANT" | T.B. | B.S. |     |
|          |     |                        |      |      |     |

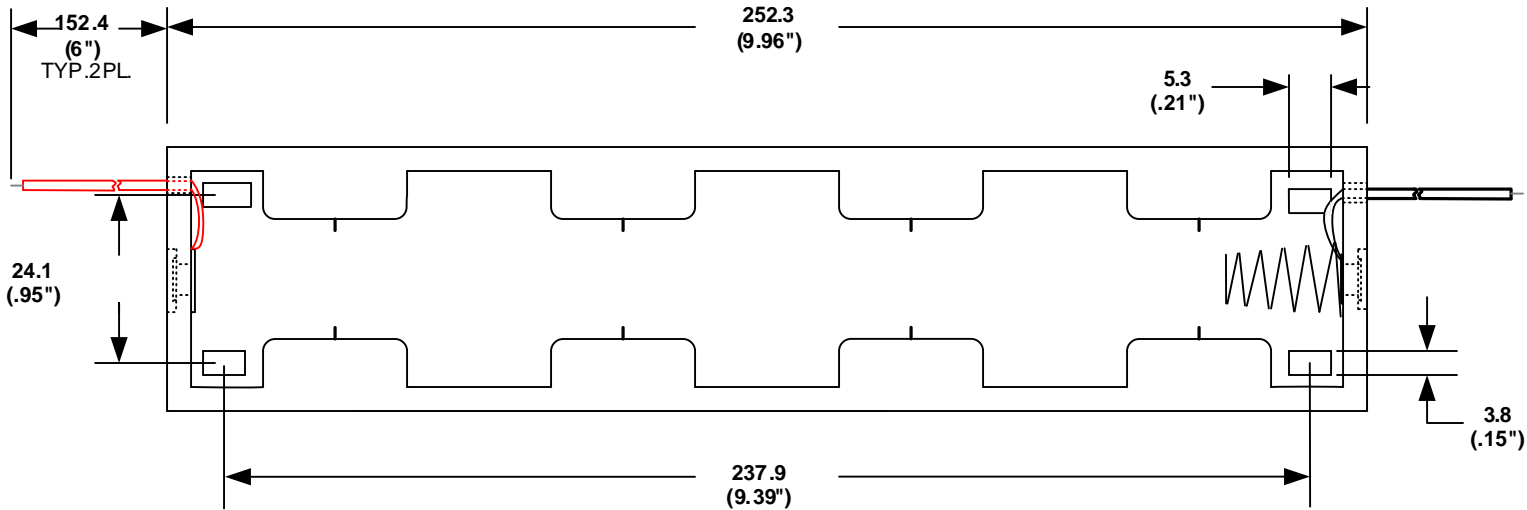

**ORDERING CODE**

**BH14D**

SOLDER LUGS = L  
WIRE LEADS = W

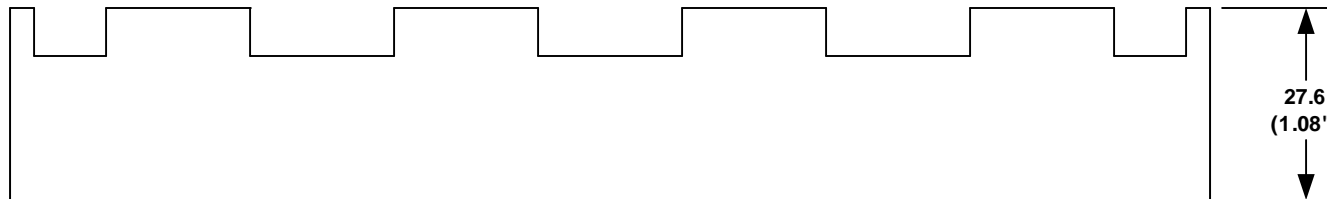


SOLDER LUGS SHOWN ABOVE

**SPECIFICATIONS :**

Plastic material - Polypropylene, Black  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated spring steel  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated  
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS COMPLIANT

**Note:** Dimensions in mm. ( inches )

|                                 |                             |  |             |
|---------------------------------|-----------------------------|--|-------------|
| TOLERANCES<br>(EXCEPT AS NOTED) |                             |  <b>Memory Protection Devices, Inc.</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |             |
| DECIMAL                         |                             |  |             |
| + .5 (.020")                    |                             |  | APPROVED BY |
| FRACTIONAL                      | TITLE                       |  |             |
| + .8 (.030")                    | <b>FOUR "D" CELL HOLDER</b> |  |             |
| ANGULAR                         | DATE                        | DRAWING NUMBER   |             |
| + 3°                            | 10/12/2007                  | <b>BH14DW</b>  |             |