

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

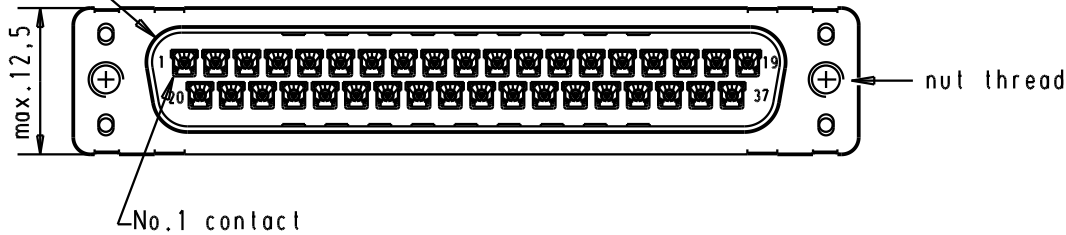

Printed board layout component side

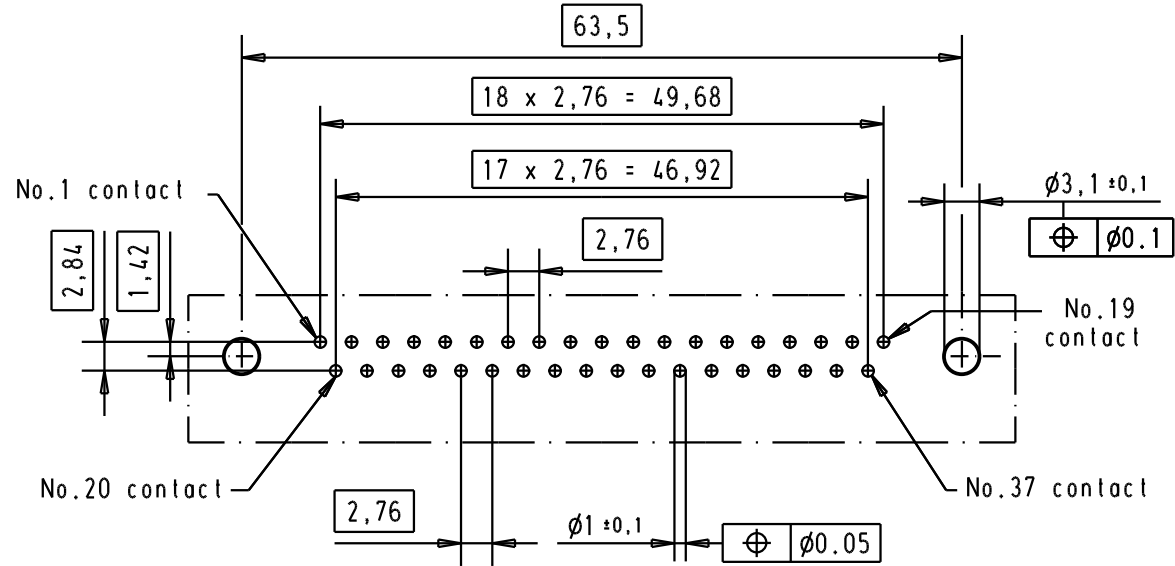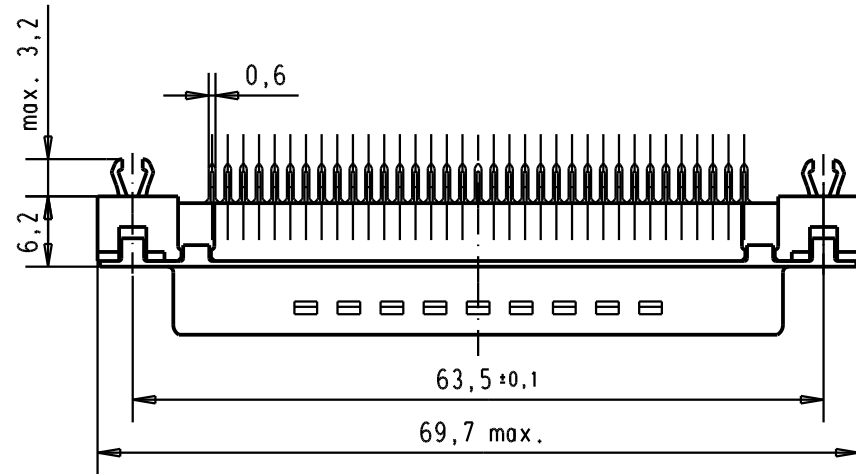

Connector retention and insertion forces on the PCB = 25 / 80 Newtons

A

09 65 461 3711	M3	1								<p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, 37 poles, male, straight, with solder pins 3,7, nuts and grounding board lock	Maßstab/ Scale 1.5:1
09 65 461 6711	M3	2				Det.	05/03/02	CV				
09 65 461 7711	M3	3				Insp.						
09 65 461 3712	4-40 UNC	1	31892	22/04/04	JH	Stand.						
09 65 461 6712	4-40 UNC	2	31523	11/07/03	TCP	HARTING EURL F-95972 Paris				TB 09 65 461 x71x	Blatt/ Page 1/	
09 65 461 7712	4-40 UNC	3	29723	05/03/02	CV	Part number	Nut thread	Performance level				Mod.