
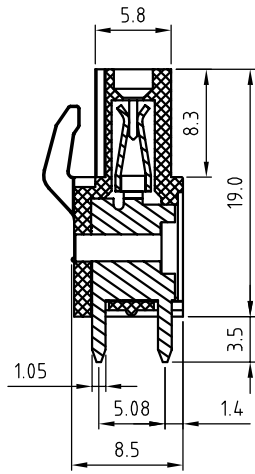
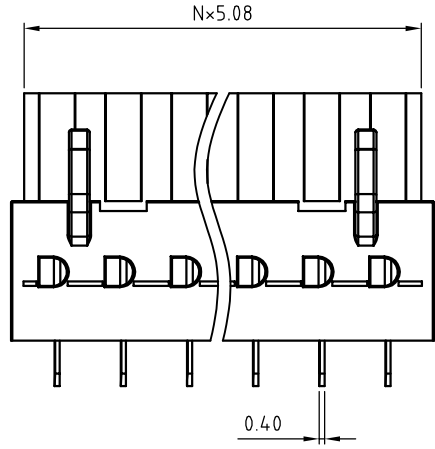


| | | | |
|---|------|-------------|----------|
| SIGN | DATE | DESCRIPTION | APPROVER |
| | | | |
| <i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i> | | | |

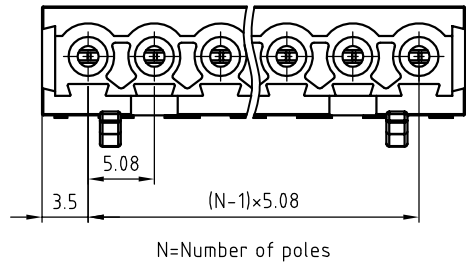

- Material**
- Wire guard: PhBz(CuSn)
 - Surface of solder tail: Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)

- Electrical**
- Voltage rating: 300VAC
 - Current rating: 20A
 - Withstanding Voltage: 1.6kv
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: us


RoHS Compliant

PART NUMBER:

OSTV7XX5150

| | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Pole | 0: Black |
| 03 3 Pole | 5: Green (Standard) |
| | 6: Blue |
| 24 24 Pole | 8: Light Grey |

P.C.B LAYOUT

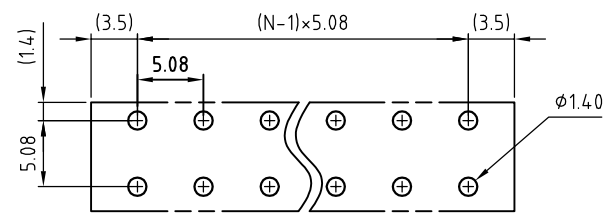

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| | | | | | |
|-----------------------|-----------------------|--|-------------------|----------|--|
| TITLE | | OSTV7 5.08mm Series 180° Vertical 2P-24P | | | |
| PART NO. | OSTV7XX5150 | DWG NO. | OSTV7XX5150.DWG | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | Tolerance |
| Shi Jun 2006.11.11 | Shi Jun 2006.11.11 | Tason 03/04`06 | Tason 03/04`06 | | X. ±0.5 X.X ±0.3 X.XX ±0.1 X° ±1° |
| SHEET: 01/01 | | | | UNIT: mm | SCALE: NONE |
| | | | | REV.: B | |