


Protective covers - HC-B24-HCLWD-PLR-BK - 1414640

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B24, with double locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, diameter of retaining cord eyelet: 30 mm

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 10 STK |
| GTIN |  4 055626 131344 |
| GTIN | 4055626131344 |

Technical data

Dimensions

| | |
|-----------------------------------|---------|
| Length | 120 mm |
| Width | 43 mm |
| Height | 21.6 mm |
| Diameter of retaining cord eyelet | 30 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Degree of protection | IP66 |
| Ambient temperature (operation) | -20 °C ... 100 °C |

General

| | |
|--|---|
| Size | B24 |
| Material | PA |
| Seal material | NBR |
| Flammability rating according to UL 94 | HB |
| Color | black |
| Seal present | yes |
| Note | Protective cover for supporting base element for double locking latch |
| Connection | Plastic protective cover for short-term protection |

Protective covers - HC-B24-HCLWD-PLR-BK - 1414640

Technical data

Standards and Regulations


| | |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

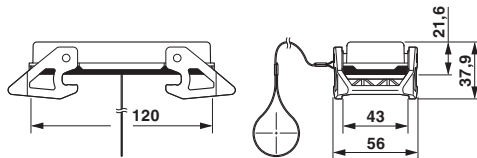

Dimensional drawing

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.AI30.B.01102 |
|-----|--|--------------------------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>