

VDSL Line Transformers

For Use with Ikanos Chipset



- Matched to Ikanos SmartLeap chipset
- Both versions designed to meet IEC950 operational or supplementary insulation requirements for working voltages up to 250 Vrms
- Compact industry standard surface mount footprint
- Extended temperature range

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C



RoHS-5 Compliant Part Number	RoHS-6 Compliant Part Number	Turns Ratio (Line:Chip)	OCL Line ($\mu\text{H} \pm 7\%$)	Leakage Inductance ($\mu\text{H} \text{ MAX}$)	Insertion Loss @ 80 kHz to 12.5 MHz (dB MAX)	HD @ 80 kHz, 4 Vp-p (dB MIN)	Hipot (Vrms)
BX4052W	-	3:1	220	1.0	1.30	-80	1500
-	BX4082WNL						
-	BX4090WANL	3.5:1	200				
-	BX4091WANL						

Notes: BX4052W and BX4091WANL are the supplementary insulation versions as per IEC950 for working voltage up to 250 Vrms.
 BX4082W and BX4090WANL are the operational insulation versions as per IEC950 for working voltage up to 250 Vrms.
 Optional Tape & Reel packagin can be ordered by adding a "T" suffix to the part number, i.e. BX4082WNLT.

Mechanical

Schematic

BX40XX

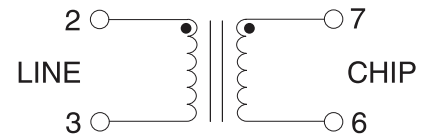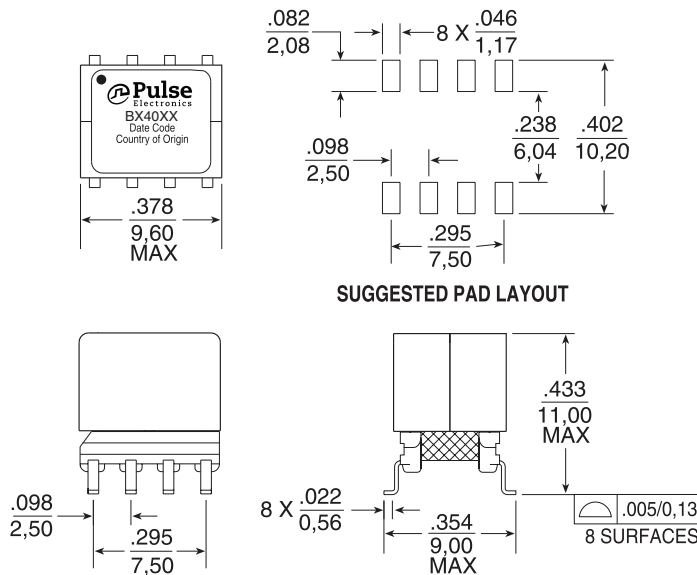

Weight1.8 grams
 Tape & Reel300/tube
 Tray95/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$

For More Information

Pulse Worldwide Headquarters
 12220 World Trade Drive
 San Diego, CA 92128
 U.S.A.

Pulse Europe
 Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057
 Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China
 Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China
 Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia
 135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363
 Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia
 3F, No. 198
 Zhongyuan Road
 Zhongli City
 Taoyuan County 320
 Taiwan R. O. C.
 Tel: 886 3 4356768
 Fax: 886 3 4356823 (Pulse)
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.