

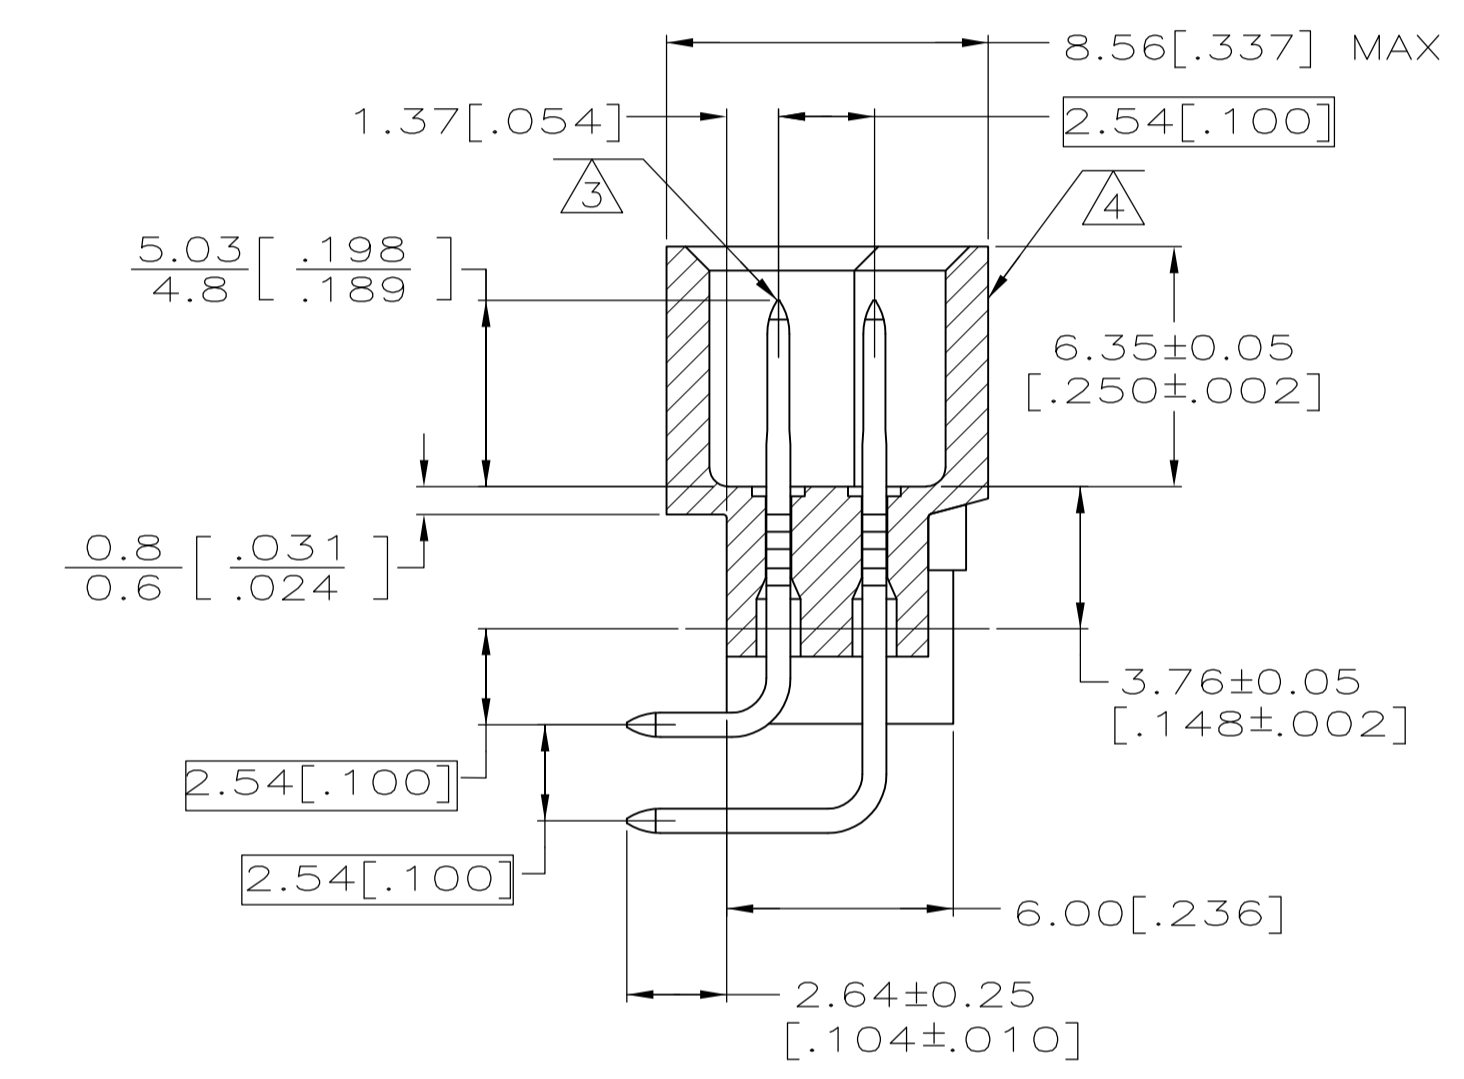
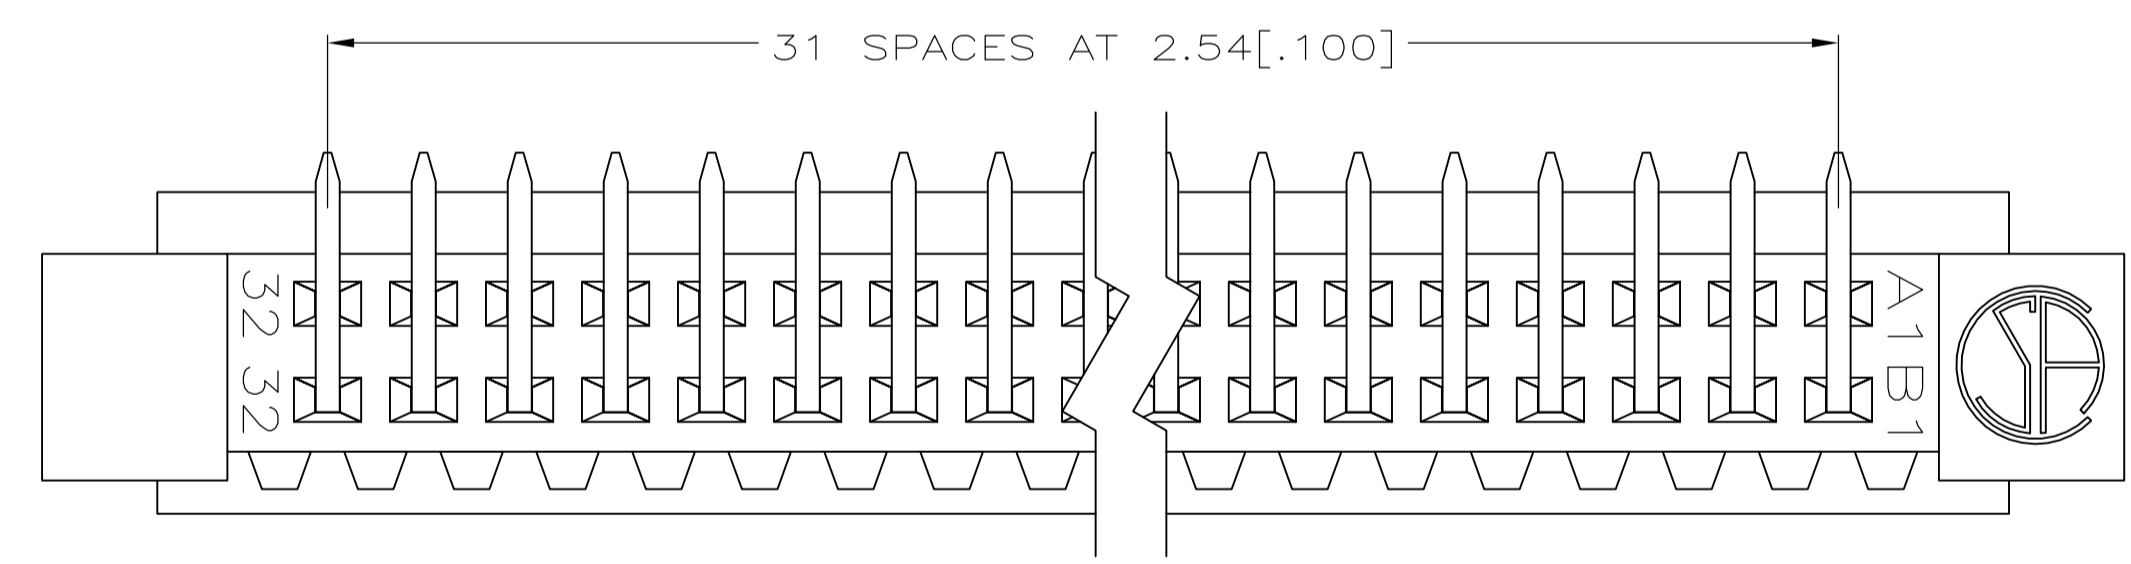
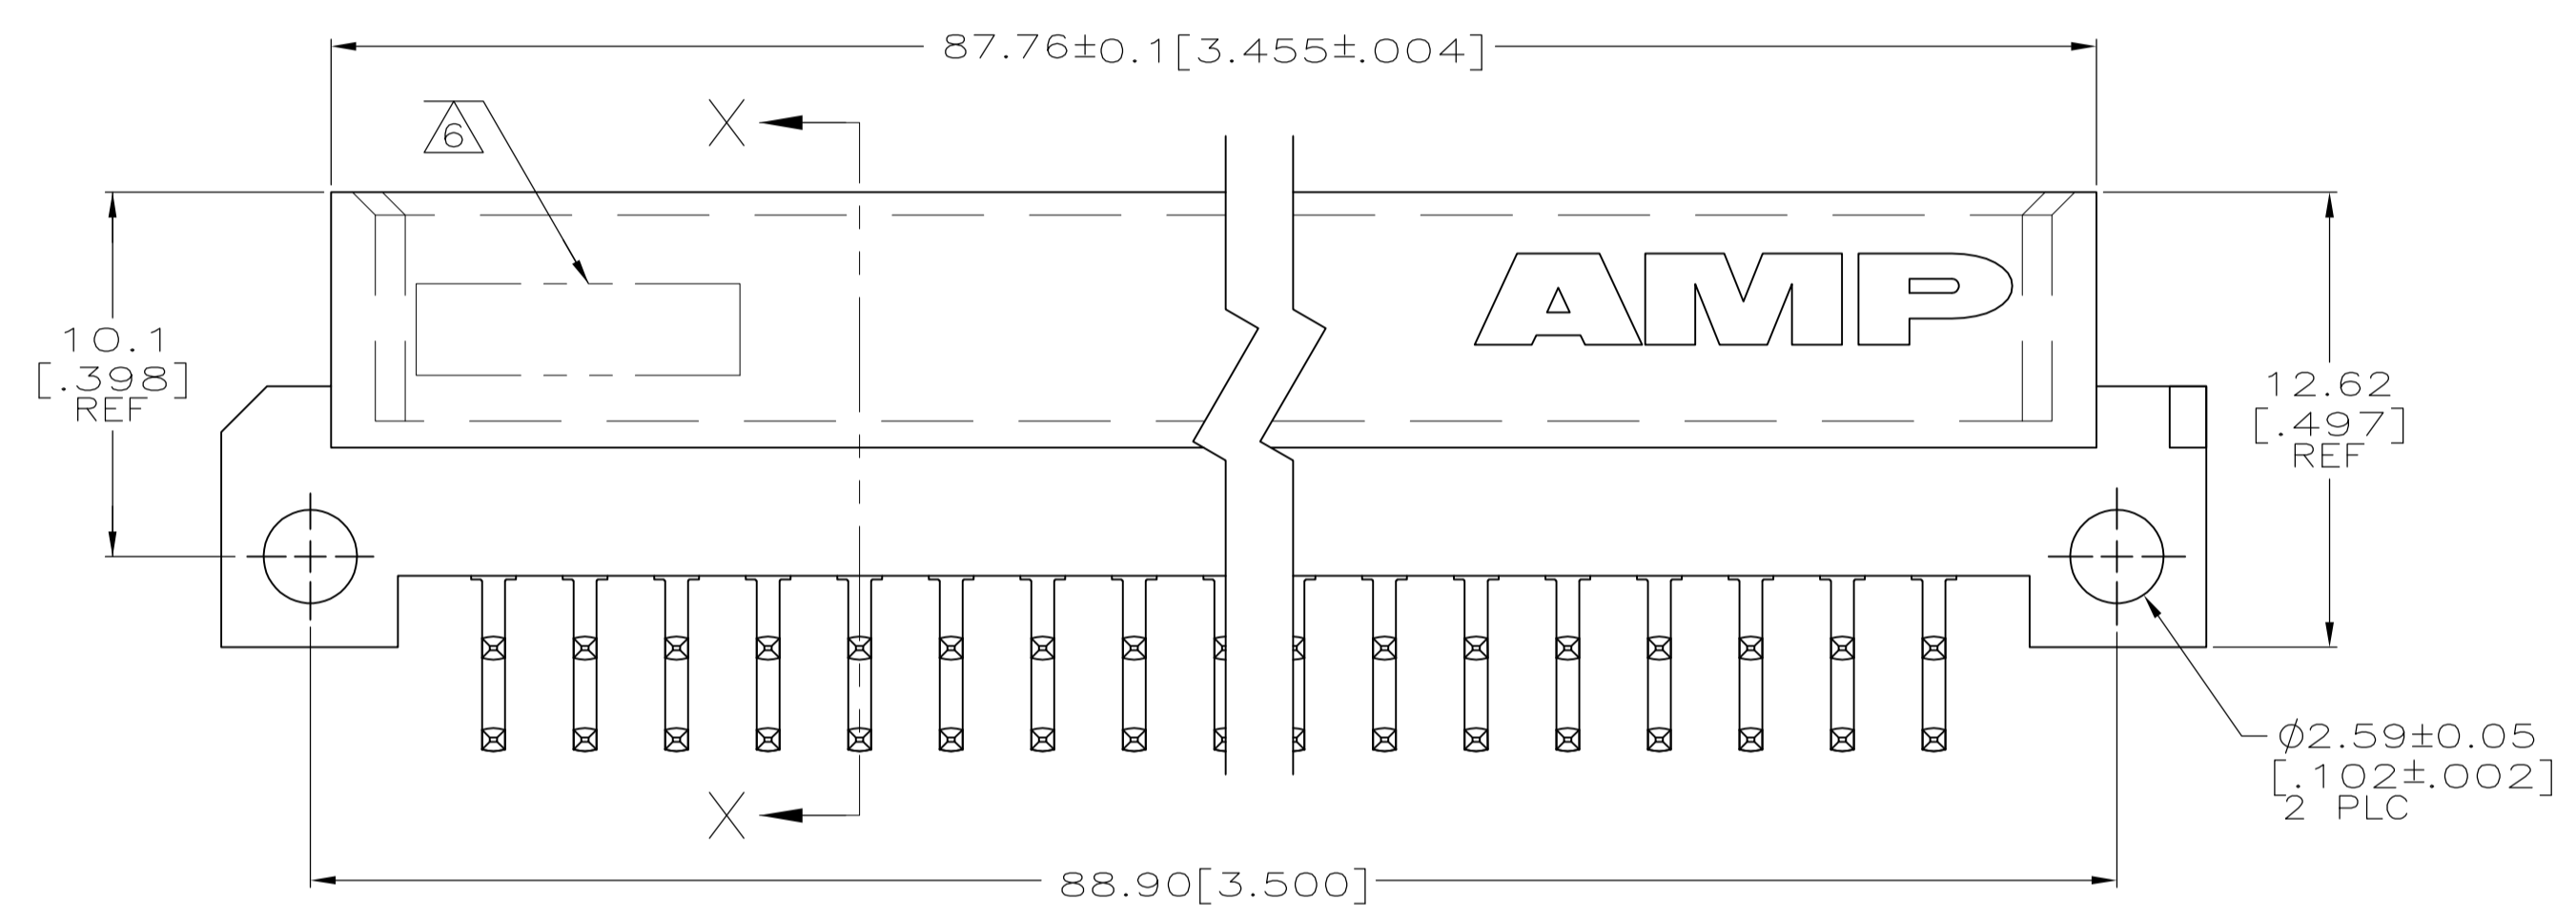


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ MARKING ON THIS SIDE.
- ⑤ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑥ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

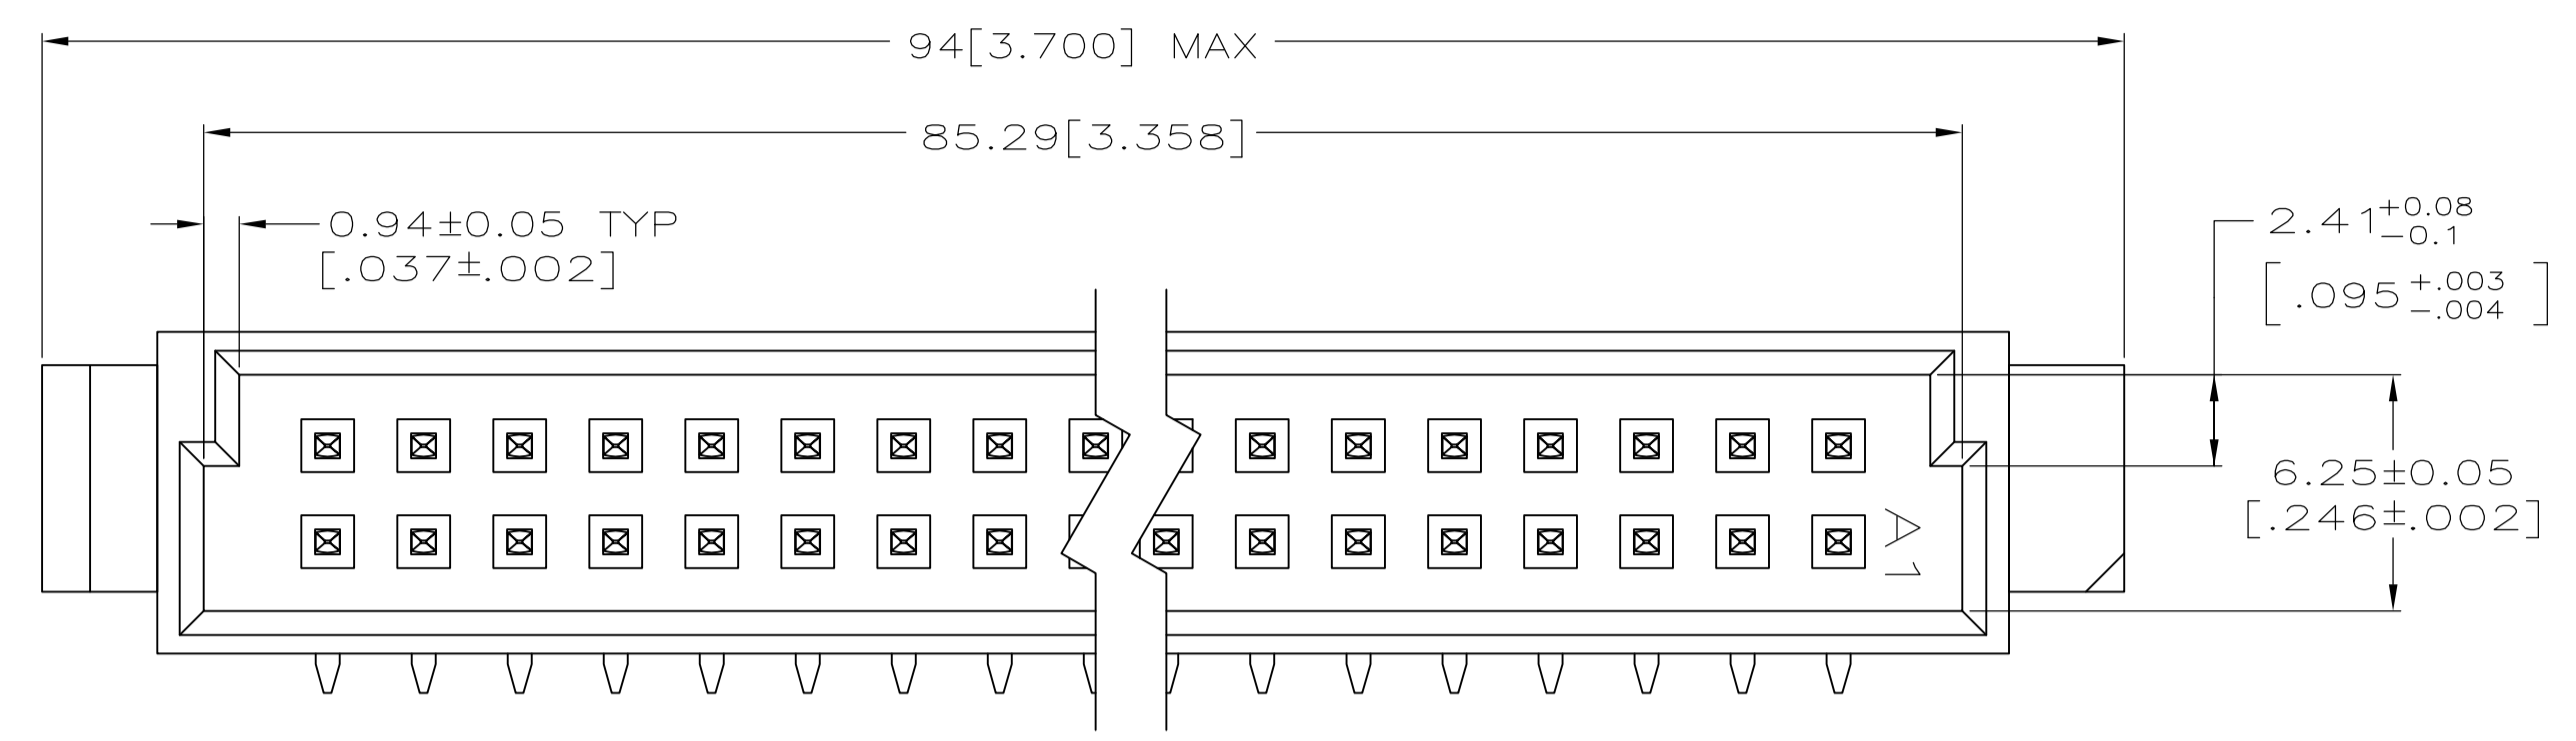

SECTION X-X

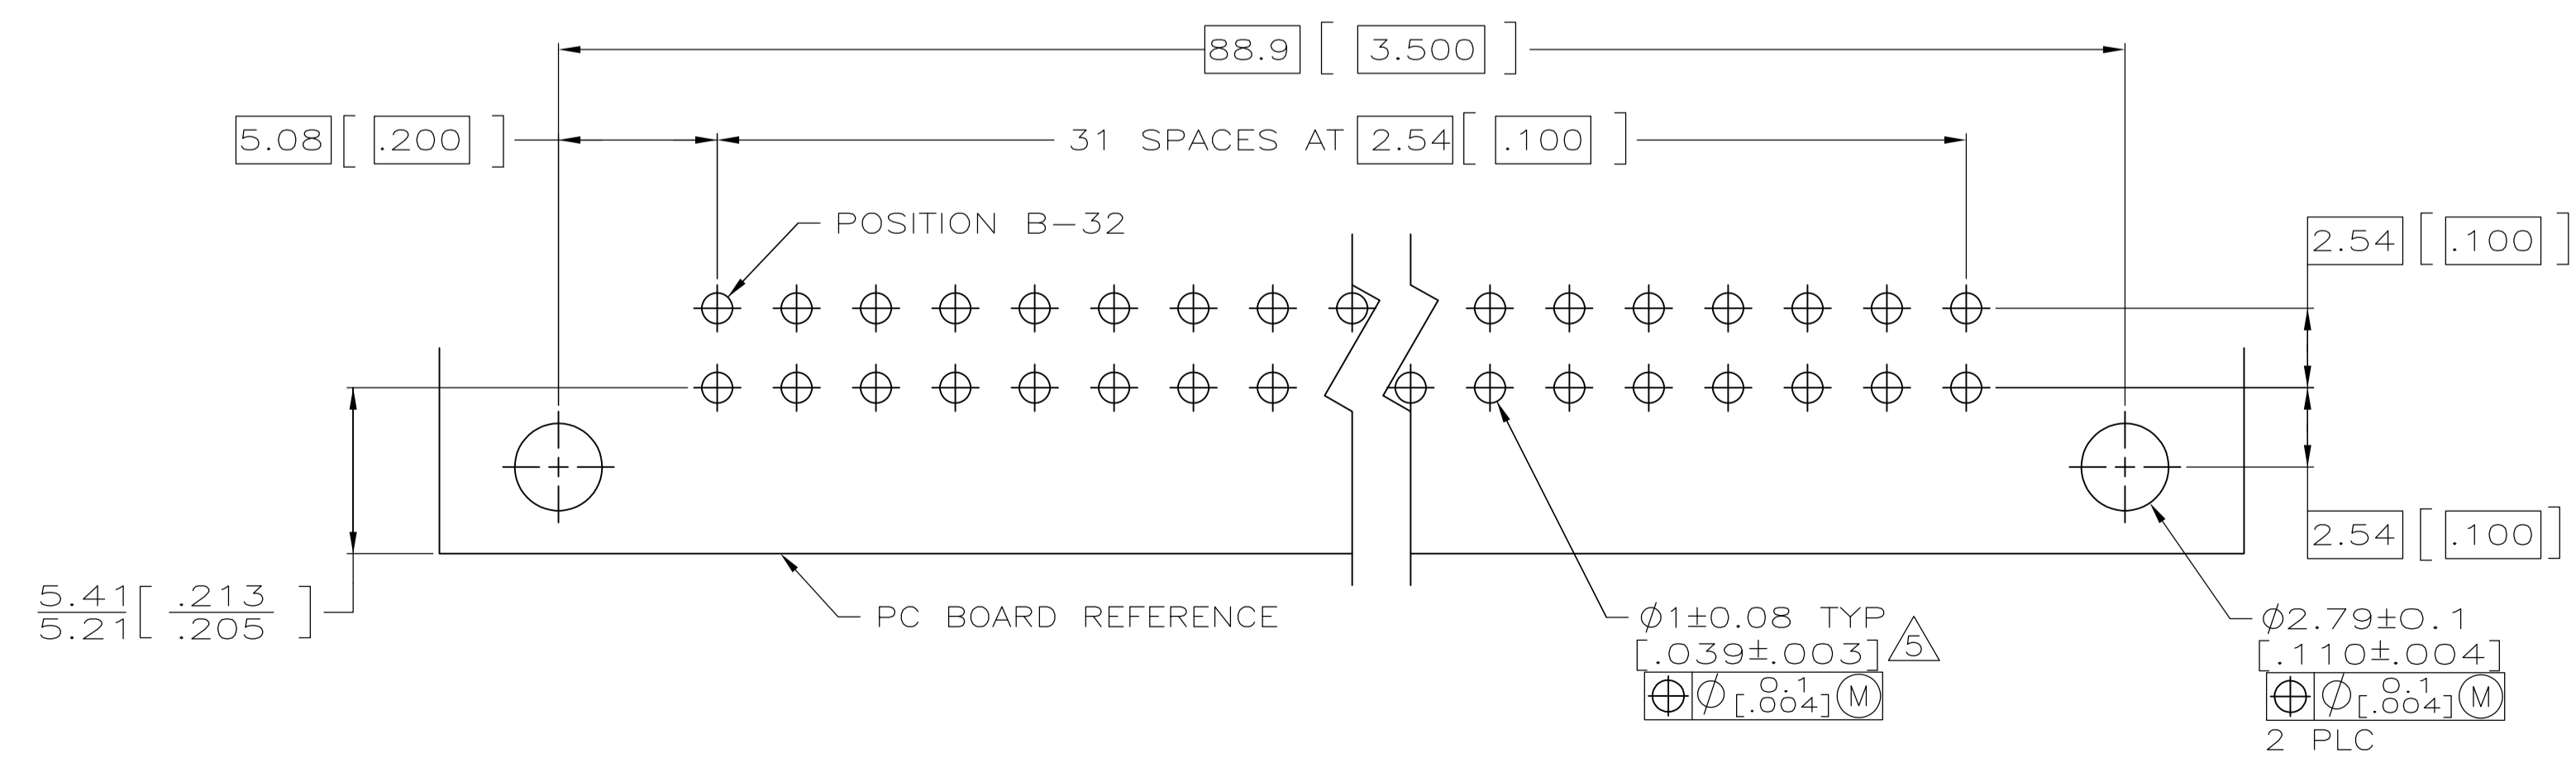

PC BOARD LAYOUT

1-32	X	X	64	5536052-5
POSITIONS LOADED	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
	ROWS LOADED			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	OSMAYOS
0 PLC ± -	1 PLC ± -	OSMAYOS	OSMAYOS
2 PLC ± 0.13[.005]	3 PLC ± -	APVD A. SHARPE	OSMAYOS
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	NAME
MATERIAL	FINISH	APPLICATION SPEC	SIZE
① ②	③	WEIGHT	CAGE CODE
			DRAWING NO
			RESTRICTED TO
			A1 00779
			SCALE 5:1
			SHEET 1 of 1
			REV P

STE TE Connectivity

ASSEMBLY, PIN, EUROCARD, TYPE B, 64 POSITION, 2.64[.104] SOLDER POST

C=5536052