



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT 1983

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14					REVISED & REDRAWN PER 0720-0303-93	8-27-93	BB



**METRIOS**  
DIMENSIONS LISTED IN mm [ INCHES ]

NOTE:  
1. WIRE INSULATION DIA 11.30[.445] MAX

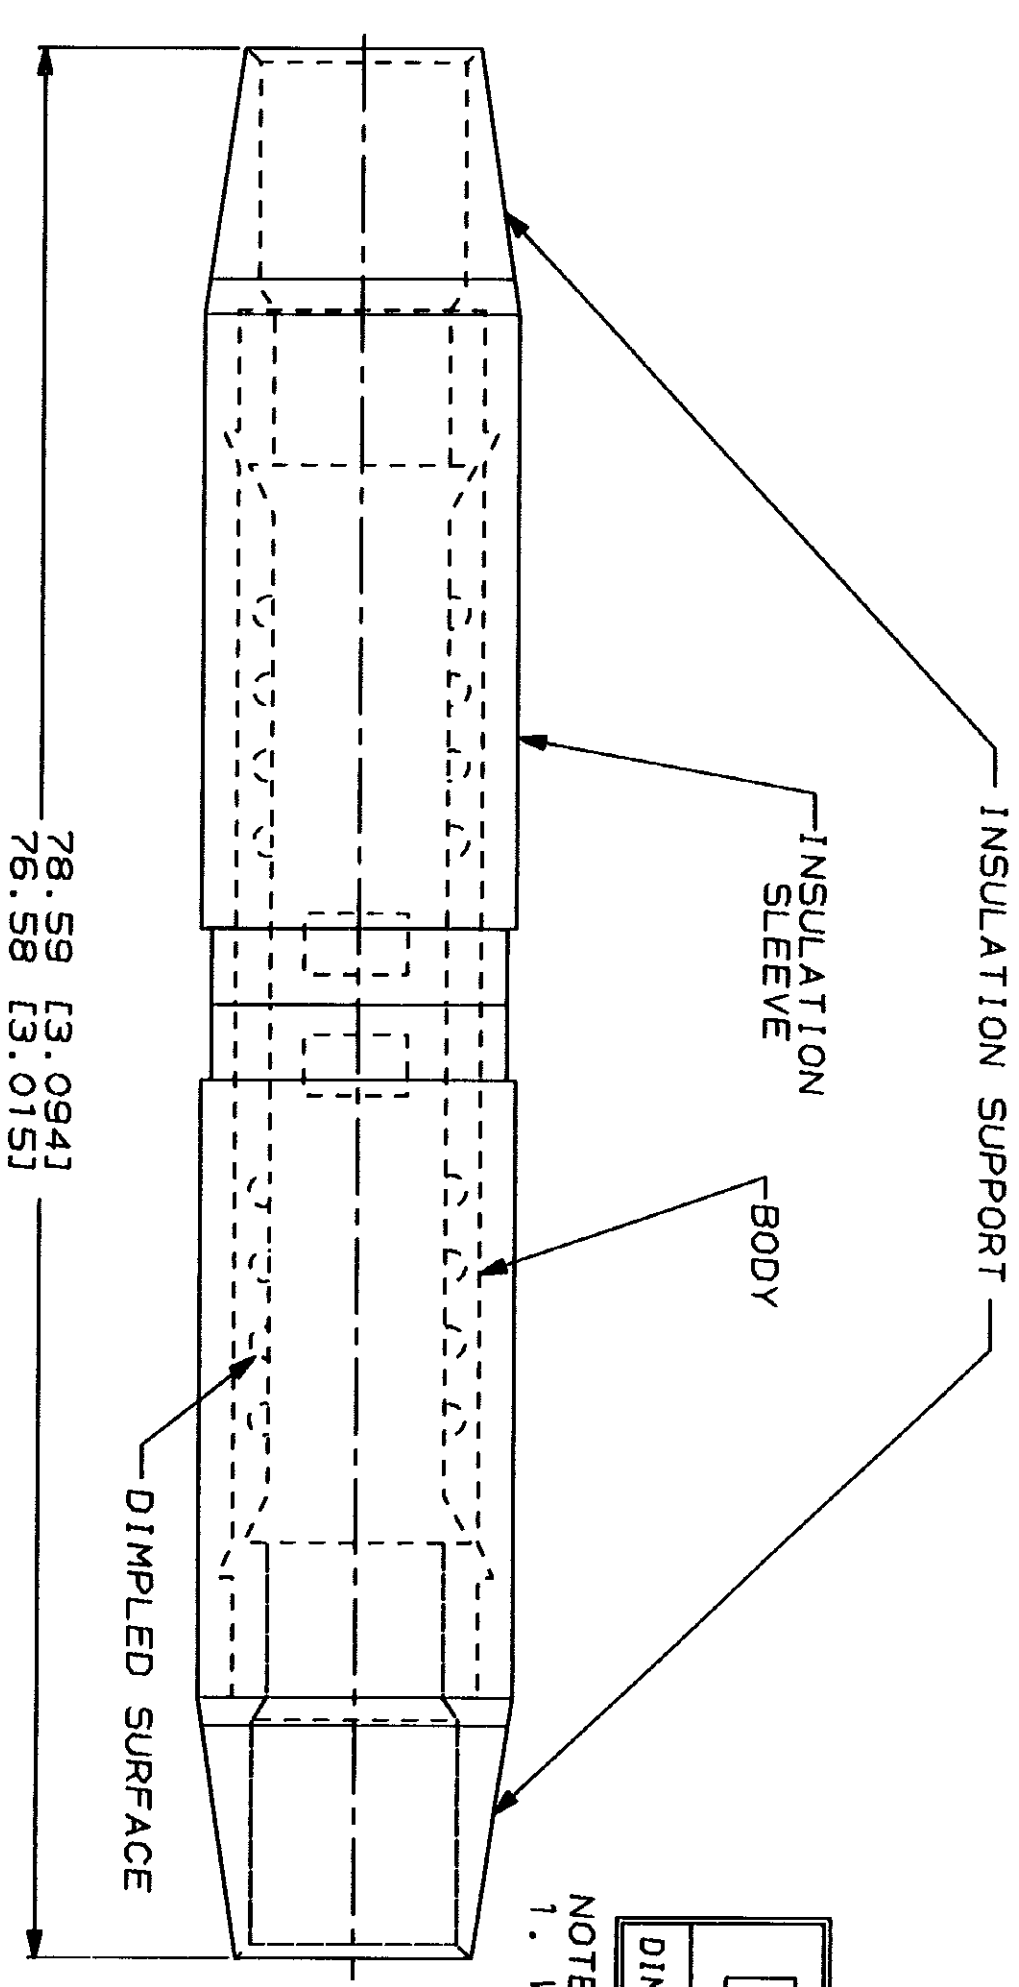

**AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C	DO NOT SCALE PRINT. UNLESS SPECIFIED OTHERWISE TOLERANCES ON: 2 PLC DEC ± 0.20(.008) 3 PLC DEC ± .1 ANGLES	DR 8-27-93 S.S. GOLDEN	QTY	LOOSE PC	324623
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600 V MAX	MATERIAL COPPER PER ASTM B-152 ANILIN, COLOR, RED	CHK 8-27-93 R. HERSEY			
TOOLING INFORMATION	1-800-526-5142	CIRCULAR MIL AREA: 26.65-45.41mm² [S2, 600-83, 700] STRANDED	FINISH TIN PLATE PER MIL-T-10727	APPD 8-27-93 M. BLIS			
FOR ORDER ENTRY			APPLICATION SPEC	PRODUCT SPEC	SCALE		