
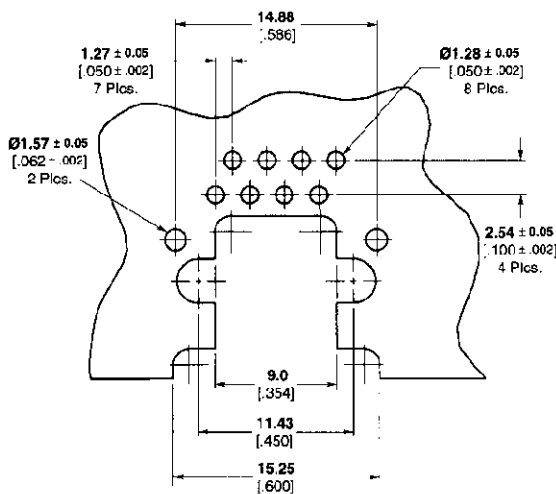




Modular Jacks (Continued)
RJ45 Single Port (Continued)
Side Entry, Shielded, Through-hole, 10mm Height


(Photo 109264-7)




Recommended PC Board Layout

Recommended Panel Cutout

Pos./Contacts	(IR) Reflow Compatible	Panel Ground	Part Number	Performance Level
8/8	Y	Y	1116062-1	CAT 5 (2 Pair 1-2, 3-6)
8/8	Y	N	1116503-1	CAT 5 (2 Pair 1-2, 3-6)
8/8	Y	N	1116504-1	CAT 5 (2 Pair 1-2, 3-6) (unshielded)

Note: Shielded product with panel grounds always contains PCB grounds.

Top Entry, Unshielded, Through-hole


(Photo 109864-3)


Recommended PC Board Layout

Recommended Panel Cutout

Pos./Contacts	(IR) Reflow Compatible	Panel Stops	Part Number	Keyed	Performance Level
8/8	—	Y	520259-4	—	CAT 3
8/8	Y	—	559284-1	—	CAT 3
8/8	—	—	556416-1	—	CAT 3
8/8	—	Y	520260-4	Y	CAT 3
8/8	—	—	555799-1	Y	CAT 3