

## Housing - HC-STA-B10-HLWD-1TTM25-EL-AL - 1412638

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing B10, With double locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, straight, Height: 57 mm, Cable gland: none, Gland: no, 1x M25, Standard

### Why buy this product

- good shielding in the event of electromagnetic interference



### Key Commercial Data

Packing unit	1 STK
Custom tariff number	85389099
Country of origin	China

### Technical data

#### Dimensions

Height	57 mm
Width	44 mm
Length	73 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP69K (ISO 20653:2013-02, with suitable screw connection)
	IP67
Degree of protection of housing (NEMA)	4
	4X
	12
Ambient temperature (operation)	-40 °C ... 125 °C

# Housing - HC-STA-B10-HLWD-1TTM25-EL-AL - 1412638


## Technical data

### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Sleeve housing
Locking type	With double locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	none
Type of the screw connection	1x M25
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	PA

## Drawings

Dimensional drawing

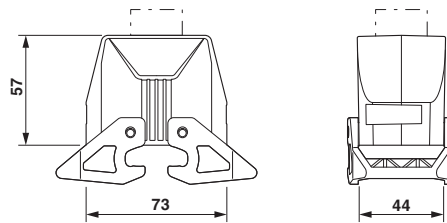

Dimensional drawing

## Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143423
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 5.0	EC000437
----------	----------

## Approvals

Approvals

## Housing - HC-STA-B10-HLWD-1TTM25-EL-AL - 1412638

### Approvals

---

Approvals

EAC / GL

---

Ex Approvals

---

Approvals submitted

---

### Approval details

EAC
-----

GL
----

### Accessories

#### Accessories

##### Full screw connection

Cable gland - G-INS-M25-M68N-NNES-S - 1411165



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 11 mm ... 17 mm, Shielding: No, Connecting thread: M25, Color: silver

---

Cable gland - G-INSEC-M25-S68N-NCRS-S - 1411190



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 11 mm ... 16 mm, Shielding: yes, Connecting thread: M25, Color: silver

---

## Housing - HC-STA-B10-HLWD-1TTM25-EL-AL - 1412638

### Accessories

Cable gland - HC-M-KV-M25(1ASI) - 1584020



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M25

---

### Housing latches

Housing brackets - HC-STA-B10-24-DL-PLBK - 1412886



Double locking latch for B10 / B16 / B24 housing, HC-EVO....AL and HC-STA....AL

---

### Labeled device marker

Plastic label - US-EMLP (20X9) CUS - 0830085



Plastic label, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, Lettering field: 20 x 9 mm

---

### Multiple screw connection

Cable gland - HC-M-KV-M25(1X10/1X11) - 1580228



Special cable screw connection M25, brass nickel-plated, grommet with 10 mm and 11 mm holes

---

### Protective cover

## Housing - HC-STA-B10-HLWD-1TTM25-EL-AL - 1412638

### Accessories

Protective covers - HC-B10-BCSFD-P-BK - 1414628



HEAVYCON protective cover, B10, for HC-EVO-B10... supporting base element, for double locking latch, with retaining cord with combination eyelet, IP54