


**RoHS
Compliant**

**Surface Mount Termination
16 Watts, 50Ω**

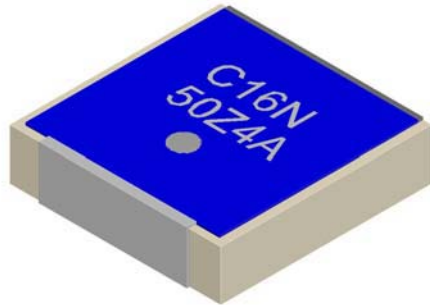

General Specifications

Resistive Element	Thick film
Finish	Matte Tin over Sulfamate Nickel
Substrate	ALN

Electrical Specifications

Resistance value:	50 ohms
Frequency Range;	DC – 3.0 GHz
Power:	16 Watts
VSWR:	<1.25:1

Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. Operating temperature is -55°C to 125°C (see chart for derating temperatures).


All dimensions in inches.

Specifications subject to change without notice.

Features:

- DC – 3.0 GHz
- 16 Watts
- ALN Ceramic
- Non-Nichrome Resistive Element
- 100% Tested
- RoHS Compliant

Outline Drawing

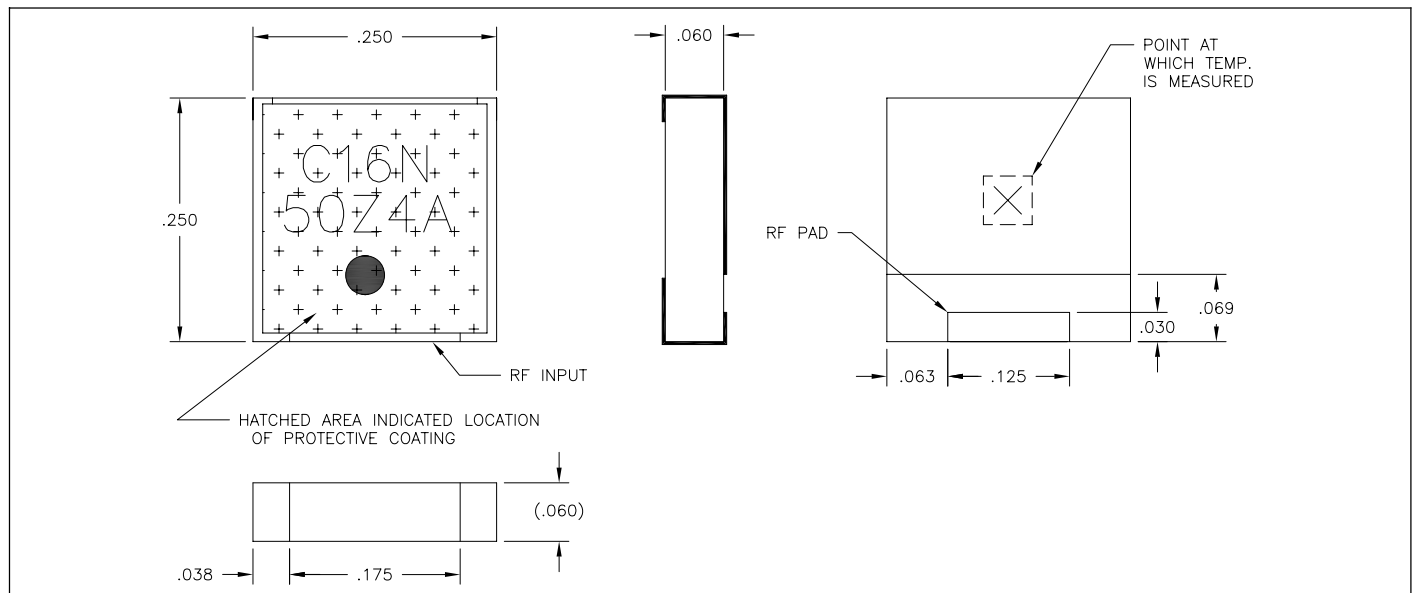


C16N50Z4A (097) Rev B







Typical Performance:

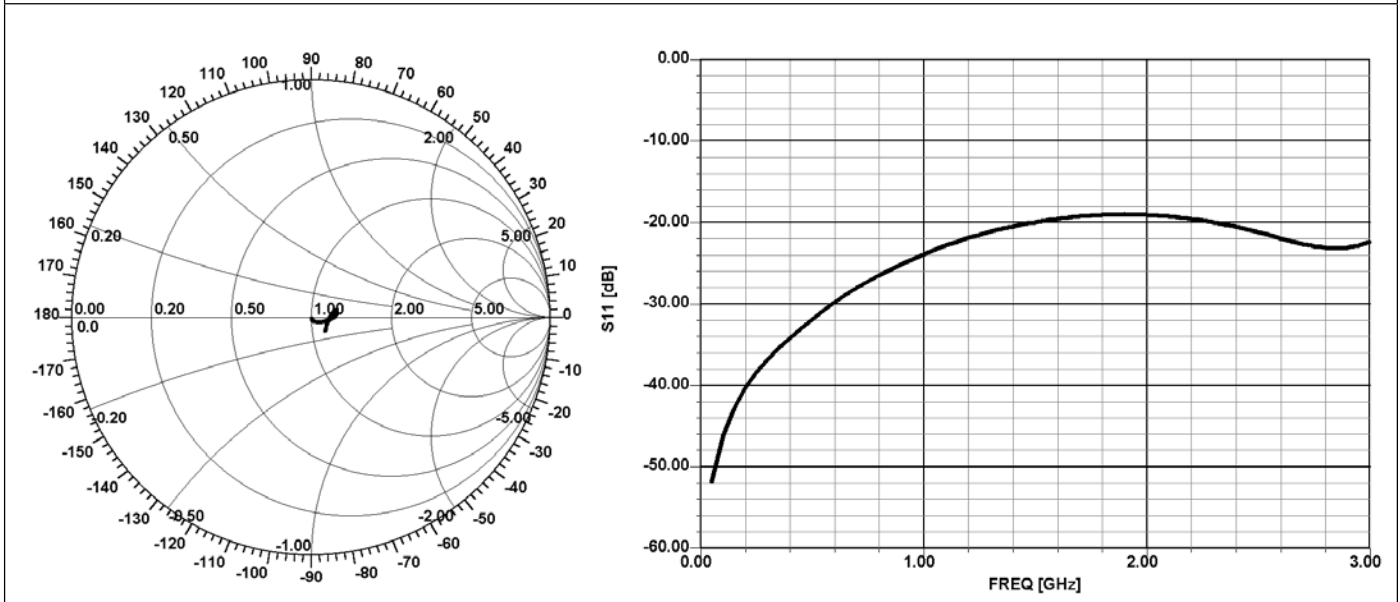

Power De-rating:

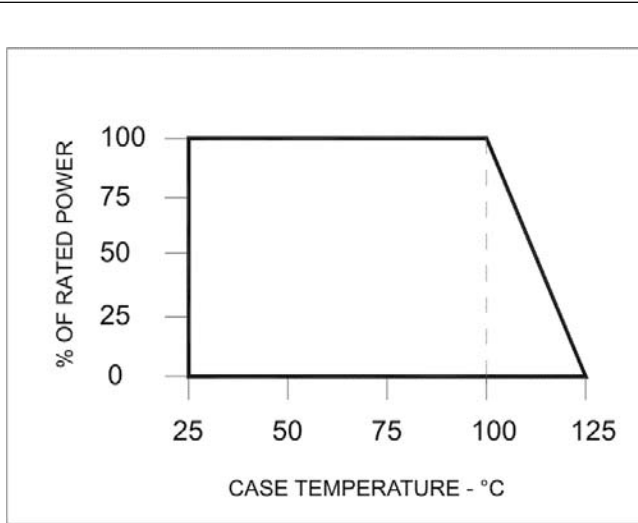

Mounting Procedure:

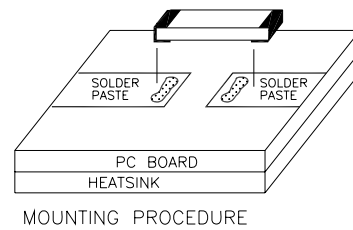

1. Make sure that the devices are mounted on flat surfaces (0.001" under the device) to optimize the heat transfer.
2. Position device on mounting surface and solder in place using an appropriate type solder.

C16N50Z4A (097) Rev B

USA/Canada: (315) 432-8909
 Toll Free: (800) 544-2414
 Europe: +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.



Anaren
 What'll we think of next?™