


RECOMMENDED PCB LAYOUT

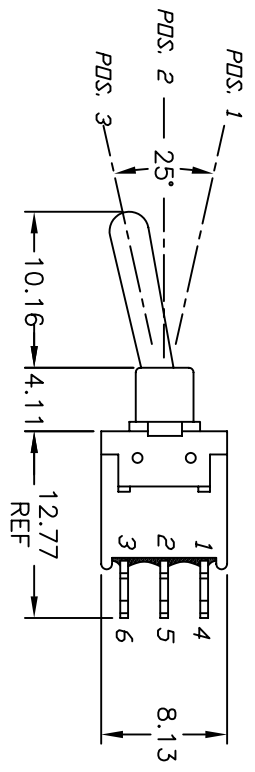


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERMINALS NUMBERS FOR REF ONLY
4. CONTACT RATING: 0.4VA max. @20V max AC or DC
5. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1000M ohm min.
7. DIELECTRIC STRENGTH: 1000 V RMS min. @sea level.
8. OPERATING TEMP.: -30°C to 85°C.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10763	RELEASED FOR PRODUCTION	7-19-00	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE		SCALE		DATE	DR	DWG	REV
2004 WMDP2 T1 A1 M6 R E		2:1		7-19-00	GLG	T201230	A

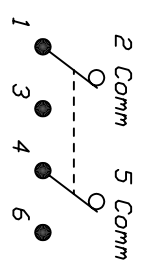

CIRCUIT: DPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	(DN)
2-3, 5-6	OPEN	2-1, 5-4

() = MOMENTARY

CONTACT CONFIGURATION