


## D-SUB cable - VS-15-DSUB-20-LI-2,0 - 1656275

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable shielded, 15-pos., stranded (7-wire), cable color RAL 7000 (gray), IP20 degree of protection, head 1 with socket shell 2 and straight cable outlet, head 2 with pin shell 2 and straight cable outlet, length: 2 m

### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 STK   |
| GTIN         | <br>4 046356 029759 |
| GTIN         | 4046356029759   |

### Technical data

#### Mechanical characteristics

|                             |          |
|-----------------------------|----------|
| Number of positions         | 15       |
| Insertion/withdrawal cycles | ≥ 50     |
| Cable outlet                | straight |
| Length of cable             | 2 m      |
| Degree of protection        | IP20     |

#### Ambient conditions

|                                 |                |
|---------------------------------|----------------|
| Ambient temperature (operation) | 0 °C ... 70 °C |
| Degree of protection            | IP20           |

#### Material data

|                          |              |
|--------------------------|--------------|
| Housing material         | PVC          |
| Contact material         | Copper alloy |
| Contact surface material | gold-plated  |
| Outer sheath, material   | PVC          |

#### Electrical characteristics

|                     |     |
|---------------------|-----|
| Number of positions | 15  |
| Rated current       | 1 A |

# D-SUB cable - VS-15-DSUB-20-LI-2,0 - 1656275

## Technical data

### Electrical characteristics


|                       |       |
|-----------------------|-------|
| Overvoltage category  | III   |
| Degree of pollution   | 2     |
| Rated voltage (III/3) | 125 V |

### Environmental Product Compliance


|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings


Dimensional drawing

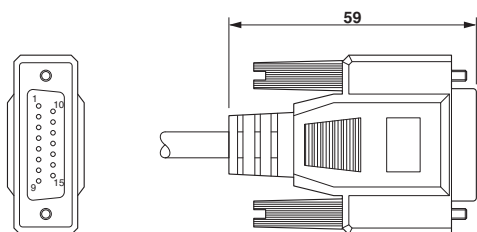


Dimensional drawing

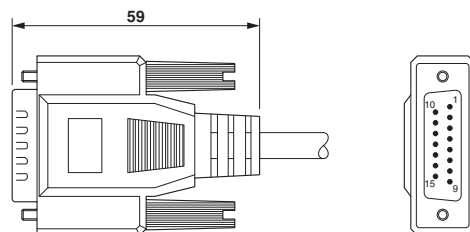


Circuit diagram

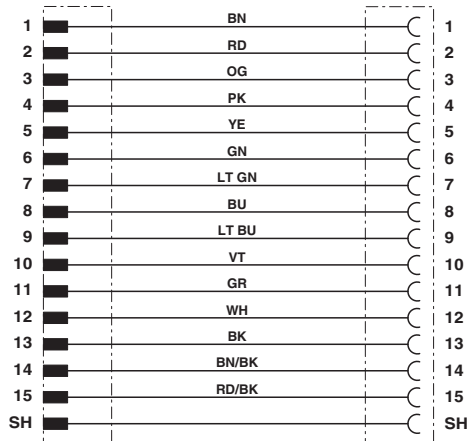

Schematic diagram



Schematic diagram



## D-SUB cable - VS-15-DSUB-20-LI-2,0 - 1656275

### Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

### Approval details

|     |   |         |
|-----|---|---------|
| EAC |  | B.00767 |
|-----|---|---------|

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>