





P.C. MOUNTING



CIRCUIT DIAGRAM



ISOMETRIC

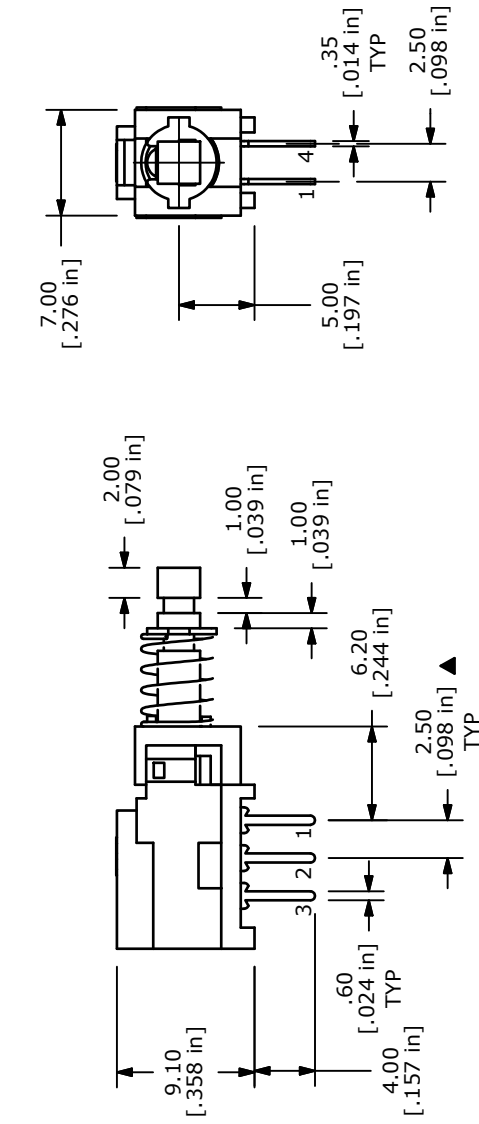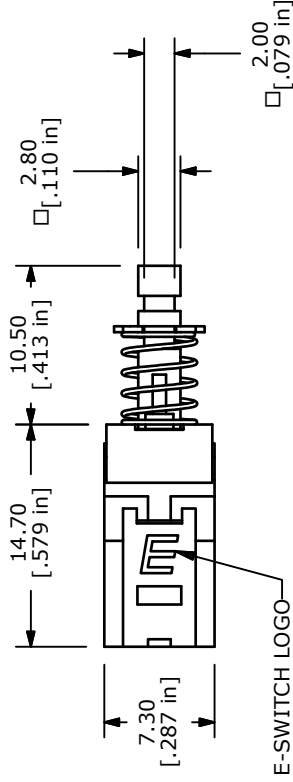

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
 - TERM. NOS. FOR REFERENCE ONLY.
 - RATING 0.1A @30V DC
 - MATERIALS:
CONTACT/TERMINALS: SILVER PLATE
HOUSING: PBT UL94HB
BASE: PA66 UL94HB
ACTUATOR: POM
 - CONTACT RESISTANCE: 100 MILLI-OHM (INITIAL)
 - TIMING: SHORTING
 - OPERATING FORCE: 230± 50GF
 - TRAVEL: MOMENTARY
2MM TO MAKE
3MM OVERALL
 - ELECTRICAL LIFE: 10000 CYCLES
 - OPERATING TEMP: -20°C TO +70°C
 - ▲ DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (ROHS) COMPLIANT



TITLE PBH2UOASAGX

B	19670	UPDATE CIRCUIT DIAGRAM	2/10/11	BGL
A	16061	RELEASED FOR PRODUCTION	6/1/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE	2:1	DATE	6/1/2006	DR	CT	DWG	Q960018	REV	B
-------	-----	------	----------	----	----	-----	---------	-----	---