


**THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS**

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
  - a - As supplied
  - b - After unrestricted recovery

NOTES

RAYCLAD TRADEMARK & PART NO.,  
DRAWING PART NO., & REF. DESIGNATIONS  
LOCATED ON OUTSIDE SURFACE.

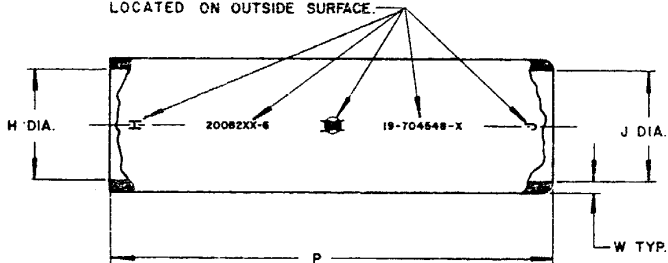

ORDERING INFORMATION

Matl No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
6	Silicone, flame retarded	RT 602	1.35

Add material number as suffix to part number;  
Example - Order 200B212-6 when silicone part is required.

**TABLE OF DIMENSIONS**

PART NO.	H		J		P	W						
	Min a	Max b	Min a	Max b								
200B202-	1.12	.37	1.12	.37	—	3.00	—	.07				
200B212-	1.70	.50	1.70	.50	—	3.00	—	.07				
200B222-	2.30	.75	2.30	.75	—	3.00	—	.10				
200B233-	3.12	.95	3.12	.95	—	3.00	—	.12				
200B246-	4.05	1.37	4.05	1.37	—	3.00	—	.12				

 RAYCLAD TUBES INCORPORATED A SUBSIDIARY OF <b>RAYCHEM CORPORATION</b>	E.O. HOP	REV D	DATE 9/67	DESCRIPTION Retyped.	DRN	DD	PART DESCRIPTION SLEEVE, STRAIGHT	PART NO. <b>200B202 thru 246</b>	REV LTR <b>D</b>
					AUTH	KT			
					AUTH	RW			
					AUTH	HP			
								DATE September 1, 1967	