
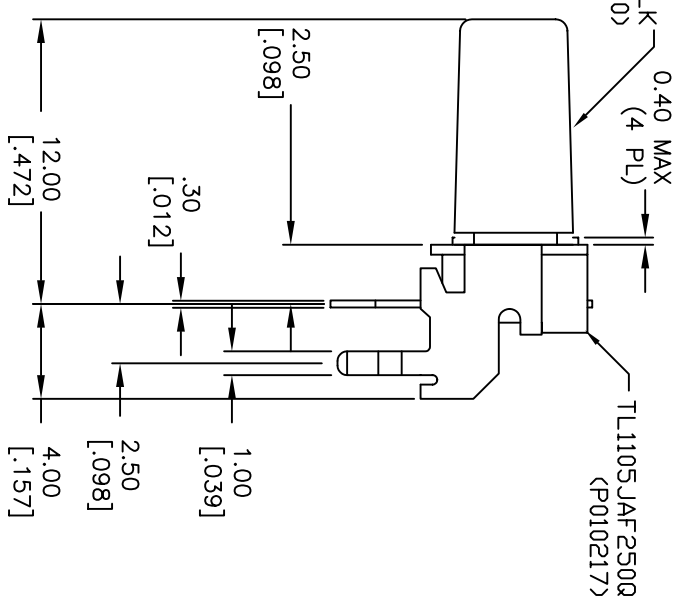


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATINGS: 12VDC, 50mA
 5. OPERATING FORCE: 250±50gf
 6. TRAVEL: 0.25±0.1mm
 7. CONTACT RESISTANCE: 100 MILLI Ω Max.
 8. DIELECTRIC STRENGTH: 250V RMS min.
 9. INSULATION RESISTANCE: 100 Mega Ω min.
 10. ELECTRICAL LIFE: 100,000 CYCLES min.
 11. DESIGNATE MAJOR FEATURE:
 12. 2002/95/EC (ROHS) COMPLIANT

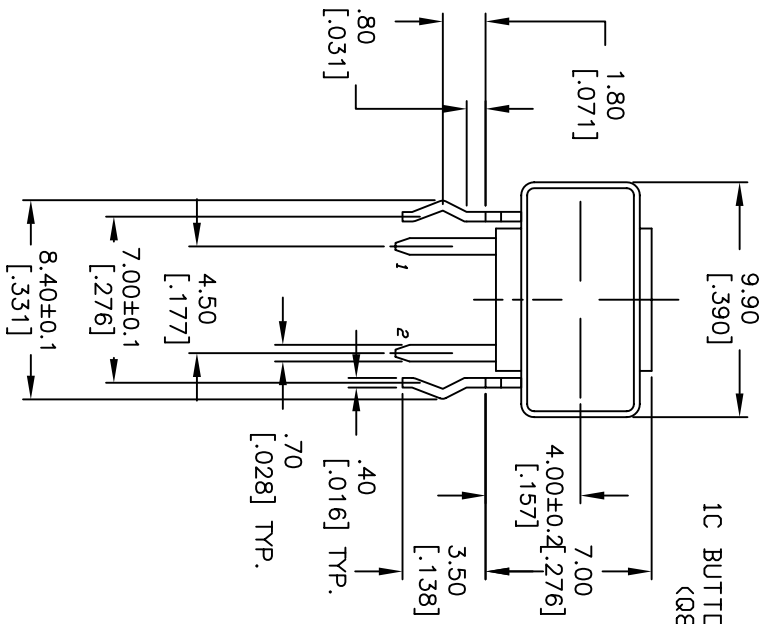

B	16005	UPDATE NOTES AND CAP PART ND.	5/04/06	CT
A	12695	RELEASED	1/6/03	CB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

TITLE		SCALE	DATE	DR	DWG	REV
TL1105JA F250 Q /1C BLK		3:1	1/6/03	CB	XP02484	B

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED