


1	LED-K
2	LED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

电阻焊接参数:

1. 工作电压: ≤3V
 2. 绝缘阻抗: >20MΩ, 25V (DC)
 3. 上线 ITO 膜材料: 0.18mm 雾面防牛
- 下线: 1. 1mm 雾面玻璃
4. 出线方式: FPC
 5. 反应时间: ≤10ms
 6. 残压: ≤5.0%
 7. 透光率: ≥78%
 8. 表面硬度: ≥3H (铅笔 H)
 9. 操作压力: ≤150g
 10. 符合 "ROSH"

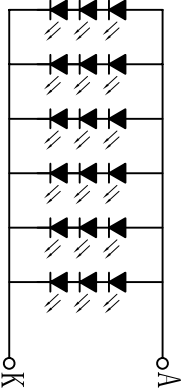

- TFT NOTE:
- 1, LCD TYPE :16. 7M COLOR , TFT
 - 2, VIEWING DIRECTION:12 0' CLOCK
 - 3, BACKLIGHT
- 1) WHITE LED 18 series connection
- 4, OPERATION TEMP. : -20° ~70°
 - 5, STORAGE TEMP. : -30° ~80°

MODEL	YX700WV03-T	DATE	2014.10.16	PAGE	1 of 1	UNIT	mm
DRAWING	LGZ	CHECK	DATE	SCALE		SIZE	A4
APPROVE		DATE					
CONTENT	NEW	DATE	2014.10.16				
REV.	01	DATE					



(3)