

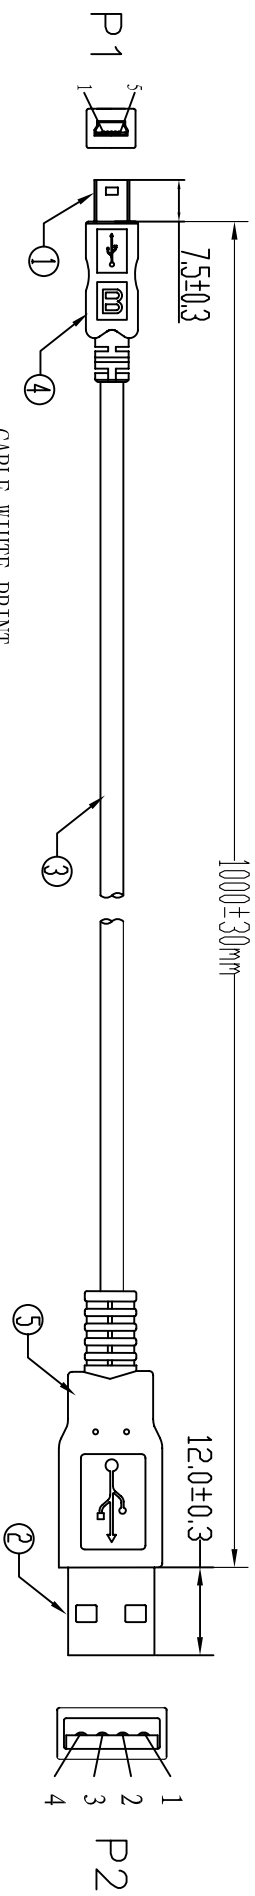


UNIT:mm

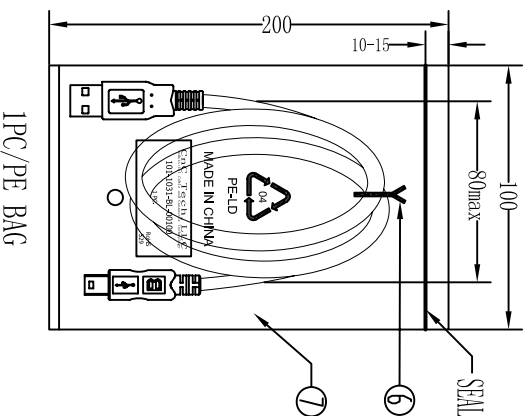

CABLE WHITE PRINT
 USB CABLE E189529 **RU** AWM 2725 VW-1 30V 80°C 28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT:

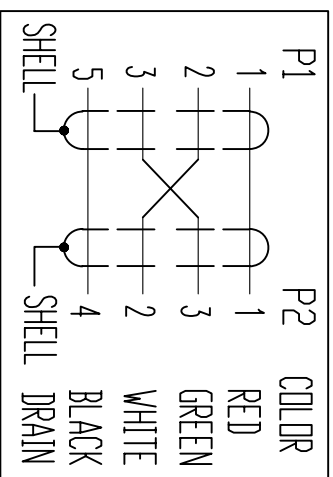

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

⑧	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS".
⑦	PE BAG	1	CLEAR SIZE: 100*200*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC".
⑥	TIE	1	BLACK L=100mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-88)
③	CABLE	1	BLACK USB1.1 U12725 28#/1P+28#/2C+AB 0D:3.8mm L=1000±10
②	CONN	1	USB A MALE SHELL: NICKEL. PIN: G/F 4PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1	USB MINI 5P MALE SHELL: NICKEL. PIN: G/F 3PCS INSULATOR COLOR: BLACK

<p style="text-align: center;">CNC Tech, LLC Industrial Cable and Connector Technology</p>		DRAWN	ZHONGHS	DRAWING NO	
		CHECKED		CUSTOMER	
APPROVAL				ITEM NO.	101-1031-BI-00100
DECIDED				DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION			

4

3

2

1