

TECHNICAL CHARACTERISTICS


MATERIAL
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: FOR 3.00MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 5A
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN
 CONTACT RESISTANCE: 20 MOHM MAX

WIRE DIMENSION:
 AWG: AWG 20 - 24

PACKAGING
 REEL OF 10KPCS

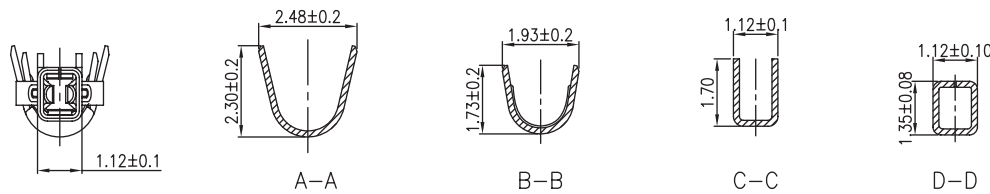


A

B

C

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A	02-NOV-11	PDF	GG
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = ± 0.2
 .XX = ± 0.15



APPROVAL: RJ

UNIT: MM
 SCALE:
 SHEET: 1/2
 DRAW: MIKE


DESCRIPTION: 3.00MM FEMALE CRIMP TERMINAL LOW FORCE

WERI PART NO: 66200313722

SIZE

A4

D

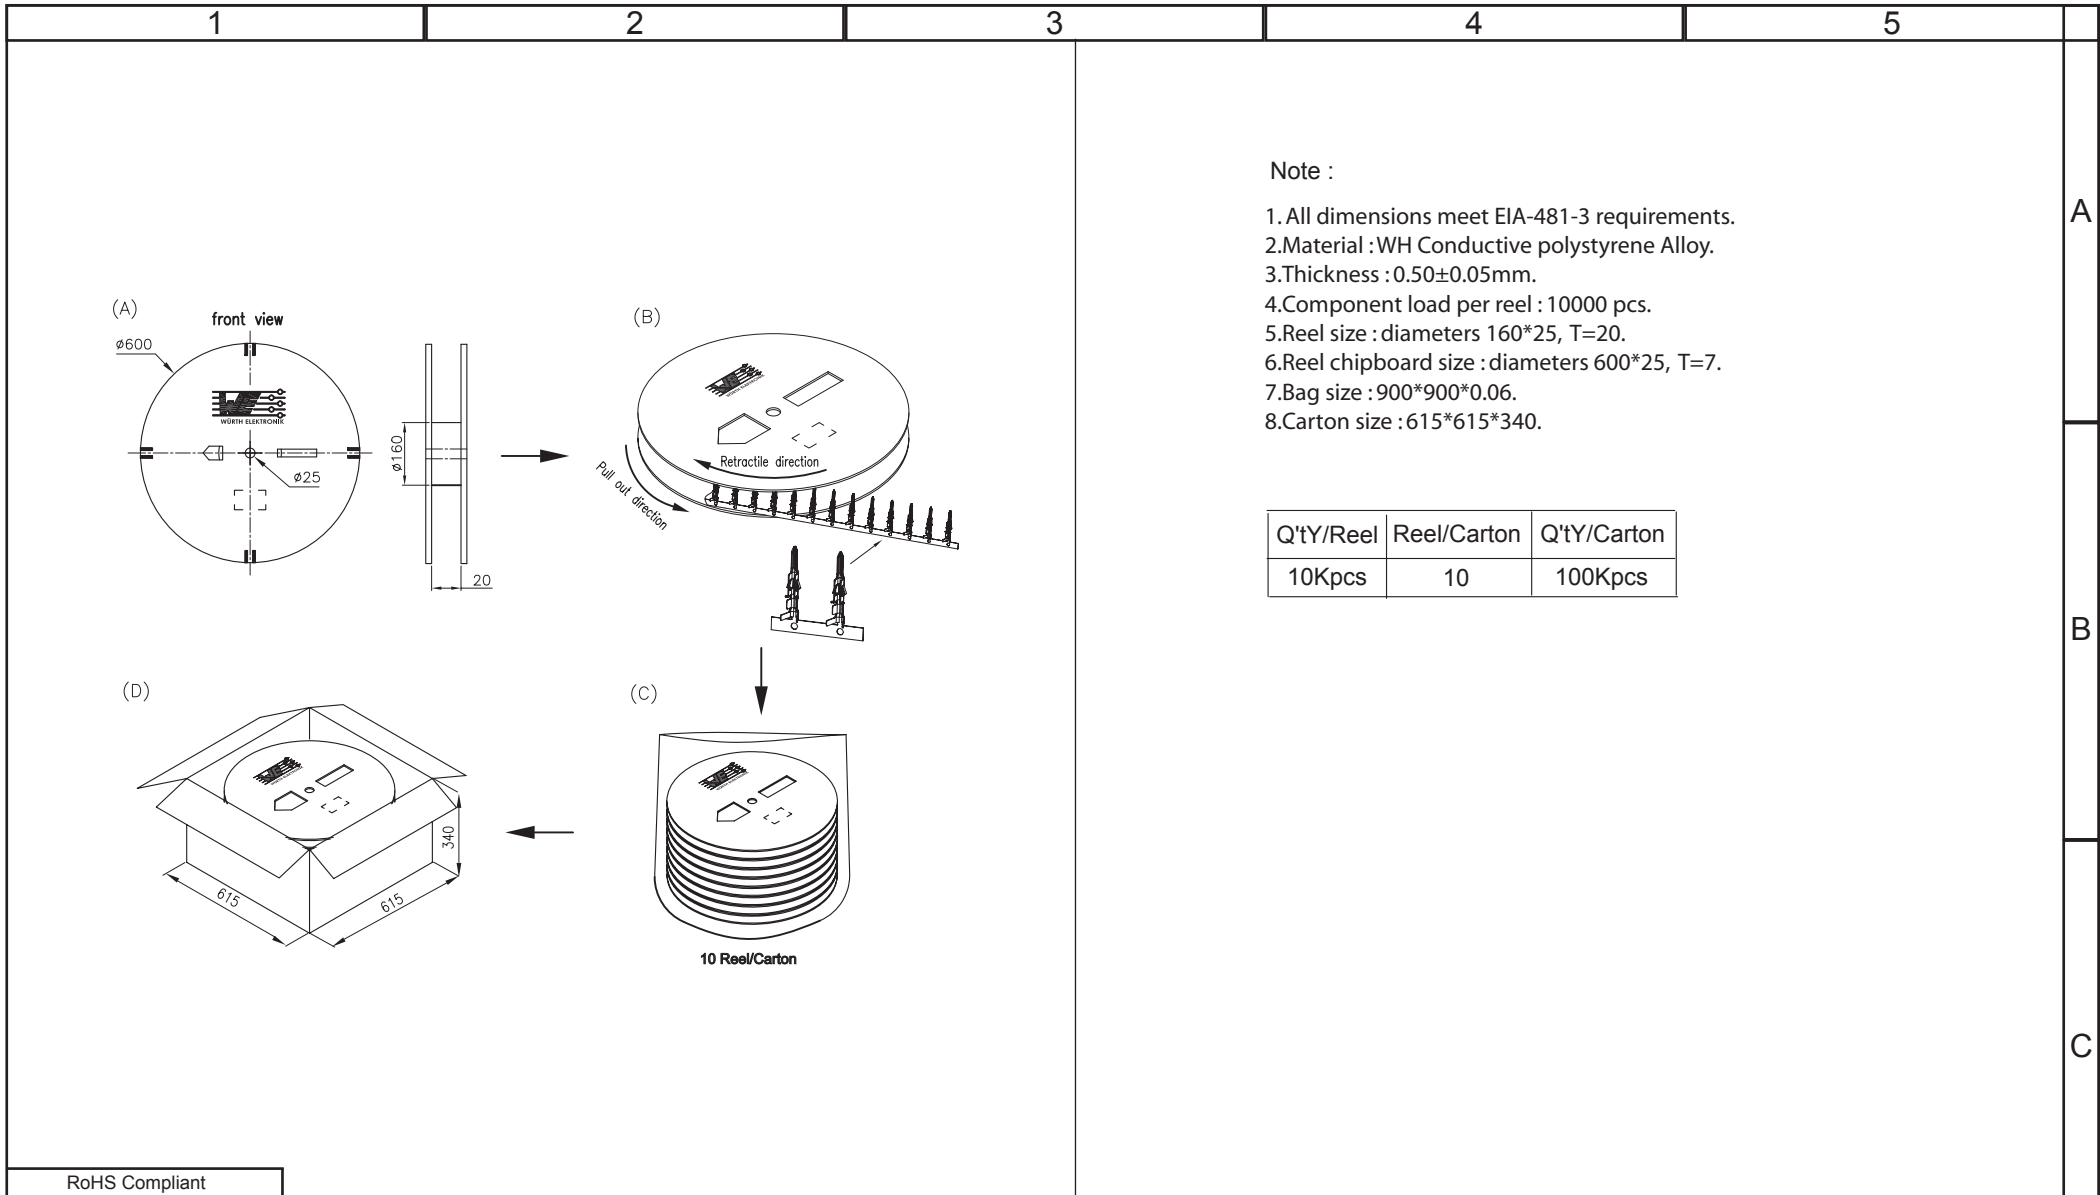

Note :

- 1. All dimensions meet EIA-481-3 requirements.
- 2. Material : WH Conductive polystyrene Alloy.
- 3. Thickness : 0.50±0.05mm.
- 4. Component load per reel : 10000 pcs.
- 5. Reel size : diameters 160*25, T=20.
- 6. Reel chipboard size : diameters 600*25, T=7.
- 7. Bag size : 900*900*0.06.
- 8. Carton size : 615*615*340.

Q'tY/Reel	Reel/Carton	Q'tY/Carton
10Kpcs	10	100Kpcs

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A			
REV	DATE	FILE	BY

PROJECTION:

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15



APPROVAL:

UNIT: MM
SCALE:
SHEET: 2/2
DRAW: MIKE

DESCRIPTION: 3.00MM FEMALE CRIMP TERMINAL LOW FORCE
WERI PART NO: 662 003 137 22

SIZE
A4