

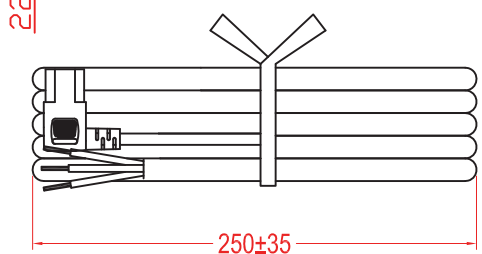


PLUG COMPONENT			PLUG STRIP DIMENSION			Wire Spec.	END STRIP DIMENSION			TERMINAL COMPONENT		
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	SJT 14AWGx3C	R.O.J	R.I.J	COLOR	COLOR	DESCRIPTION	TYPE
40P BLACK	IH-502(RA)	1	6 ⁺¹ ₋₀	15 ± 1	BLACK(L)	60°C Unshielded Black Length 500±20	50.8±5.0	15.9±3.0	BLACK(L)	BLACK(L)	FULL TINNED	
True color	Assembly Body 111-001-005	1	6 ⁺¹ ₋₀	15 ± 1	WHITE(N)		50.8±5.0	15.9±3.0	WHITE(N)	WHITE(N)	FULL TINNED	
			6 ⁺¹ ₋₀	15 ± 1	GREEN(E)		50.8±5.0	15.9±3.0	GREEN(E)	GREEN(E)	FULL TINNED	

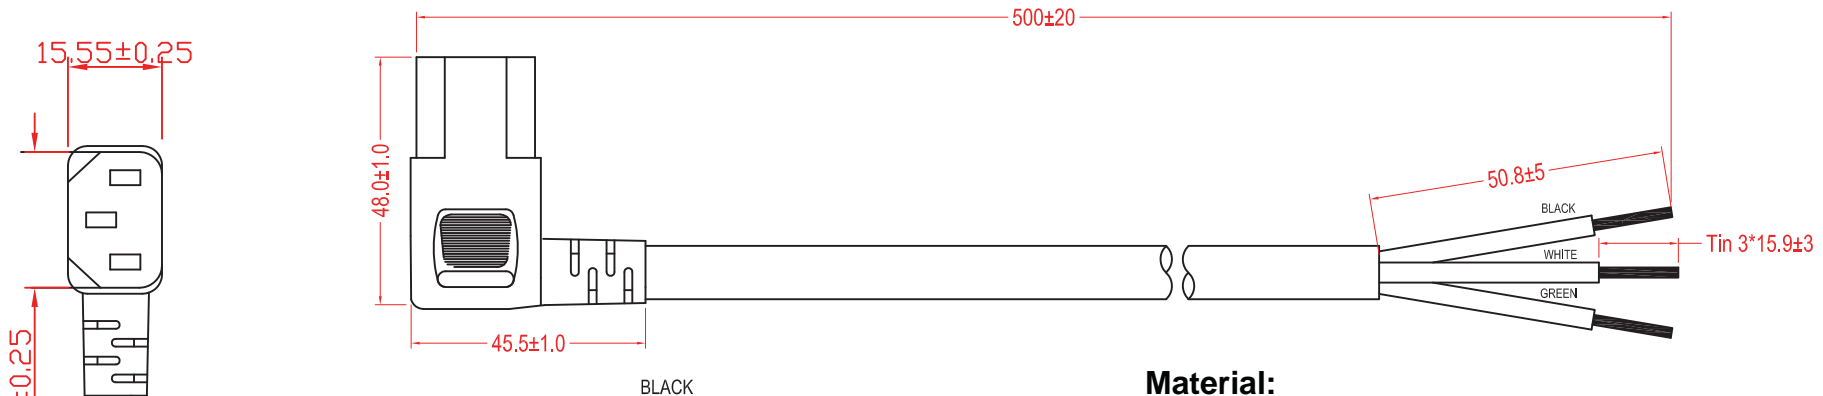

Hank dimension

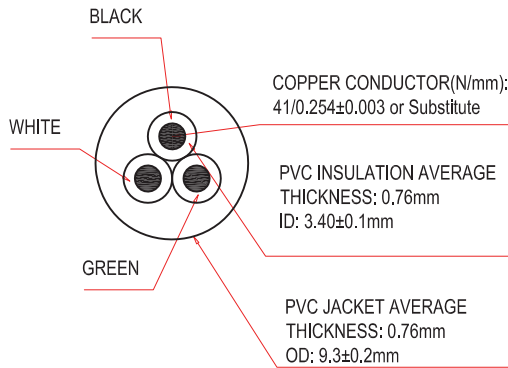

Wire cross section

Material:

- SJT 3x14AWG(2.08mm²) VW-1 60°C 300V
- Jacket color: Black
- E- Green; L- Black; N- White
- All material must be RoHS compliant

Electrical:

- 100% open & short testing
- Insulation resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

Unit: mm



Scale	Free				Date	Name	
TOLERANCE					Drawn	10.10.2015	Wilson
X.	±0.3				Approved	10.10.2015	Groll
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°						
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us	

Title Power cord - SJT 60°C 14AWG Right Angle/Open End, Unshielded 0.5 Meter	
ASSMANN WSWW-No. AK500/14-RA-6-0.5	
Drawing-No.	rev00
Replace	Sheet 1/1