



* DP1-250 FT. COILS

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO LAIRD TECHNOLOGIES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN LAIRD TECHNOLOGIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM LAIRD TECHNOLOGIES.

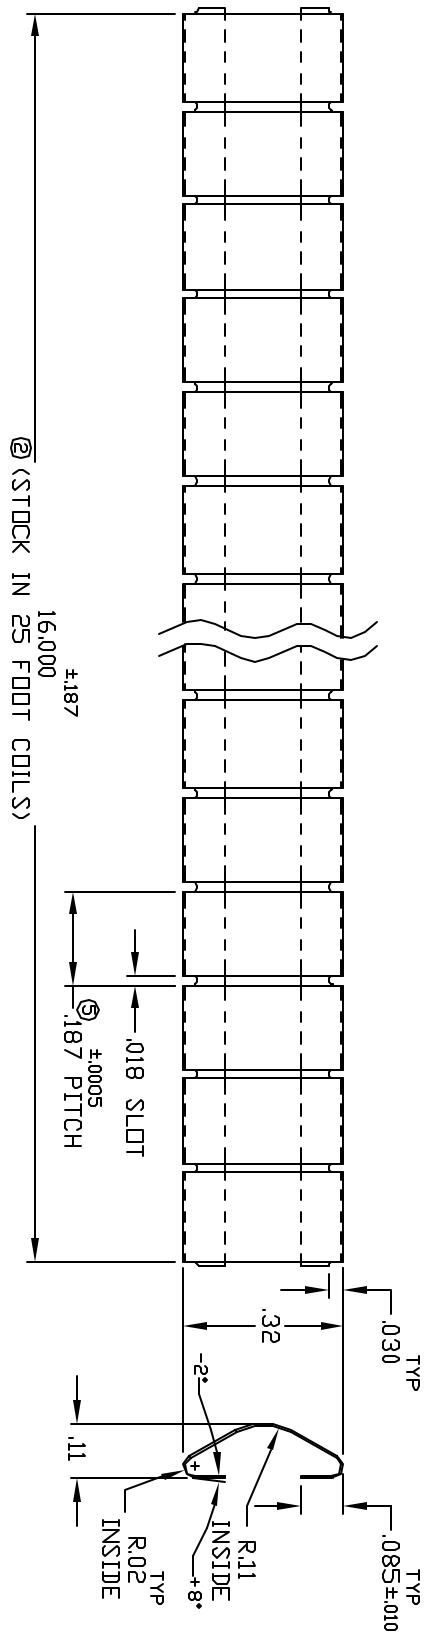

FLAT LAYOUT

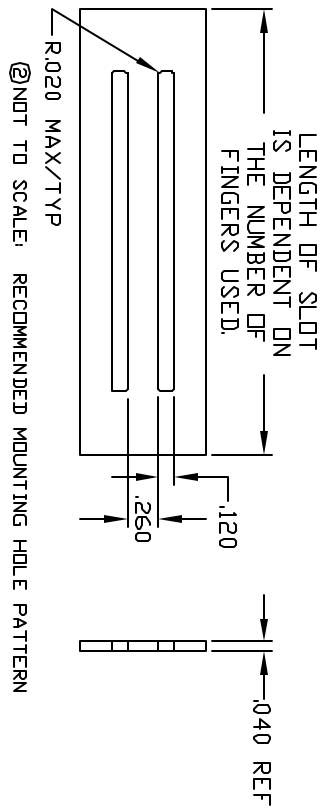

DWG. NO. 0077-0010

MATERIAL: .0035±.0002 X .564±.003 BeCu ALLOY 25 1/4 HARD ENDURANCE GRADE		TOLERANCES NOT SHOWN DECIMAL 2 PLACES ± .020 FRACTIONAL 3 PLACES ± .005	
HEAT TREAT: TO DPH 373 MINIMUM USING A 500 GRAM LOAD		ANGULAR ± ---	
THINNESS AFTER: CLEANING AND BEFORE PLATING: .00315 MIN.		THIRD ANGLE PROJECTION	
FINISH: AS REQUIRED		UNITS: INCH [MM]	
CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED.		SCALE: 4:1	

DEL. AVARE WATER GAP PENNSYLVANIA		DRAWN BY: DATE: 08/22/90	
LAIRD STANDARD		CHECKED BY: DATE: 08/23/90	
SLOT MOUNT GASKET		APPROVED BY: DATE: 08/23/90	
REF. DWG NO. 0077-0010		SUB: 08	

DWG. NO.	0077-0010
ECN-5533	ADD STOCK 25 FT. COILS. ADD MOUNTING DIMS. P/N WAS 0097-B-0926
RCC	9-27-90
ES	9-27-90
ECN-5949	DWG NO. WAS 9097-B-10
RCC	3-20-91
EVS	3-22-91
ECN-6542	ADD TO DPH1-250 FT. COILS
RCC	11-23-91
ECN-6909	.187+/--.0005 WAS .187+/--.001 PITCH.
MN	3-3-92
ES	5-6-92
ECN-7821	RECDL WAS P1.T
230' WAS 23'	
MN	2-25-93
EVS	2-23-93
ECN-E280	.563 WAS .655
JCS	6-8-98
EVS	6-11-93
ECN-E2039	ADDED +8*-2" TOL. TO LEG FORM.
RCC	12-7-00
EVS	12-7-00