


SD 023

NON-PLATED PART NUMBER	TIN-PLATED PART NUMBER	AWG WIRE RANGE	FITS MALE TAB SIZE	"L" MAX.	"B" ±1/64	"W" 1/64	"D" ±.01	"H" 1/64	"E" 1/64	REF. WIRE INSULATION DIAMETER	MATERIAL
	P-4178	14-12	.250 X .032	.802	.34	.301	.156	.107	.310	.100 / .175	.016 THICK BRASS

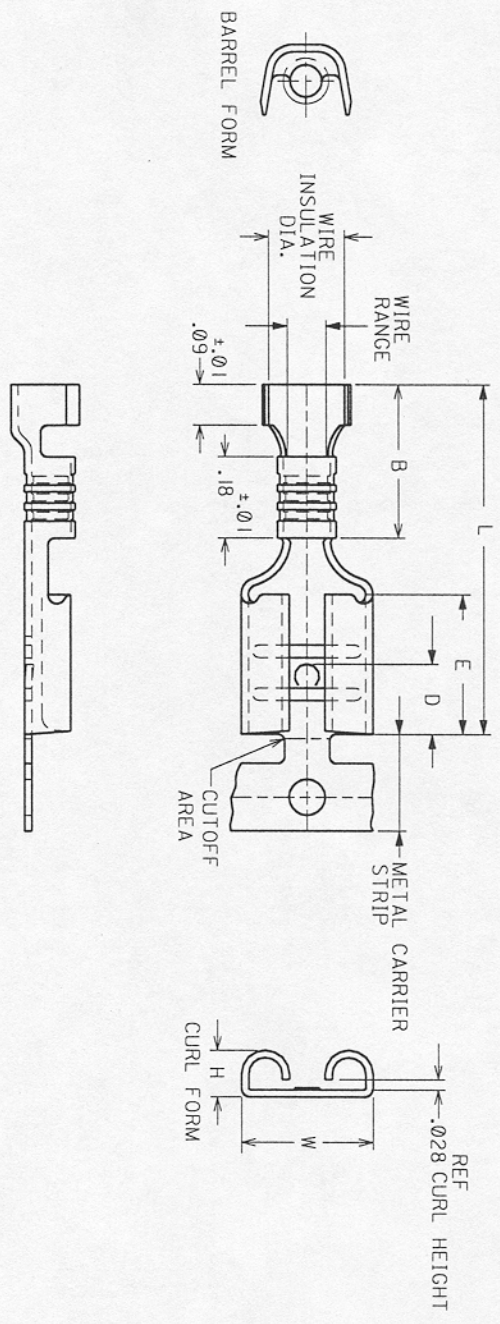

*VIBRAKRIMP®
 CLOSED ELECTRICAL BARREL W/OPEN VIBRATION SUPPORT
 METAL STRIP QUICK DISCONNECTS

DIMENSIONS SHOWN IN METRIC UNITS	
3 PLACE	±.005
2 PLACE	±.01
1 PLACE	±.025

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

DRIFT WIRE AND INSULATION MUST REMAIN WITHIN DIMENSIONS

GEN. BY: EDB RWD
 App'd: RWD SCALE: NONE

CUSTOMER DRAWING	
TITLE	REVISE ONLY ON CAD SYSTEM
CUSTOMER DRAWING	
VIBRAKRIMP O.D.	
.250 X .032 TAB SIZE	
PART NO.	SD19018-001
DATE	98/06/25
REV. NO.	A
DATE	6/25/98
BY	ETC INC.
APP'D	ETC INC.
SCALE	1:1
SIZE	B

REV. NO.	DATE	DESCRIPTION
A	6/25/98	NEW CUSTOMER DWG FOR P-4178 ET80350