

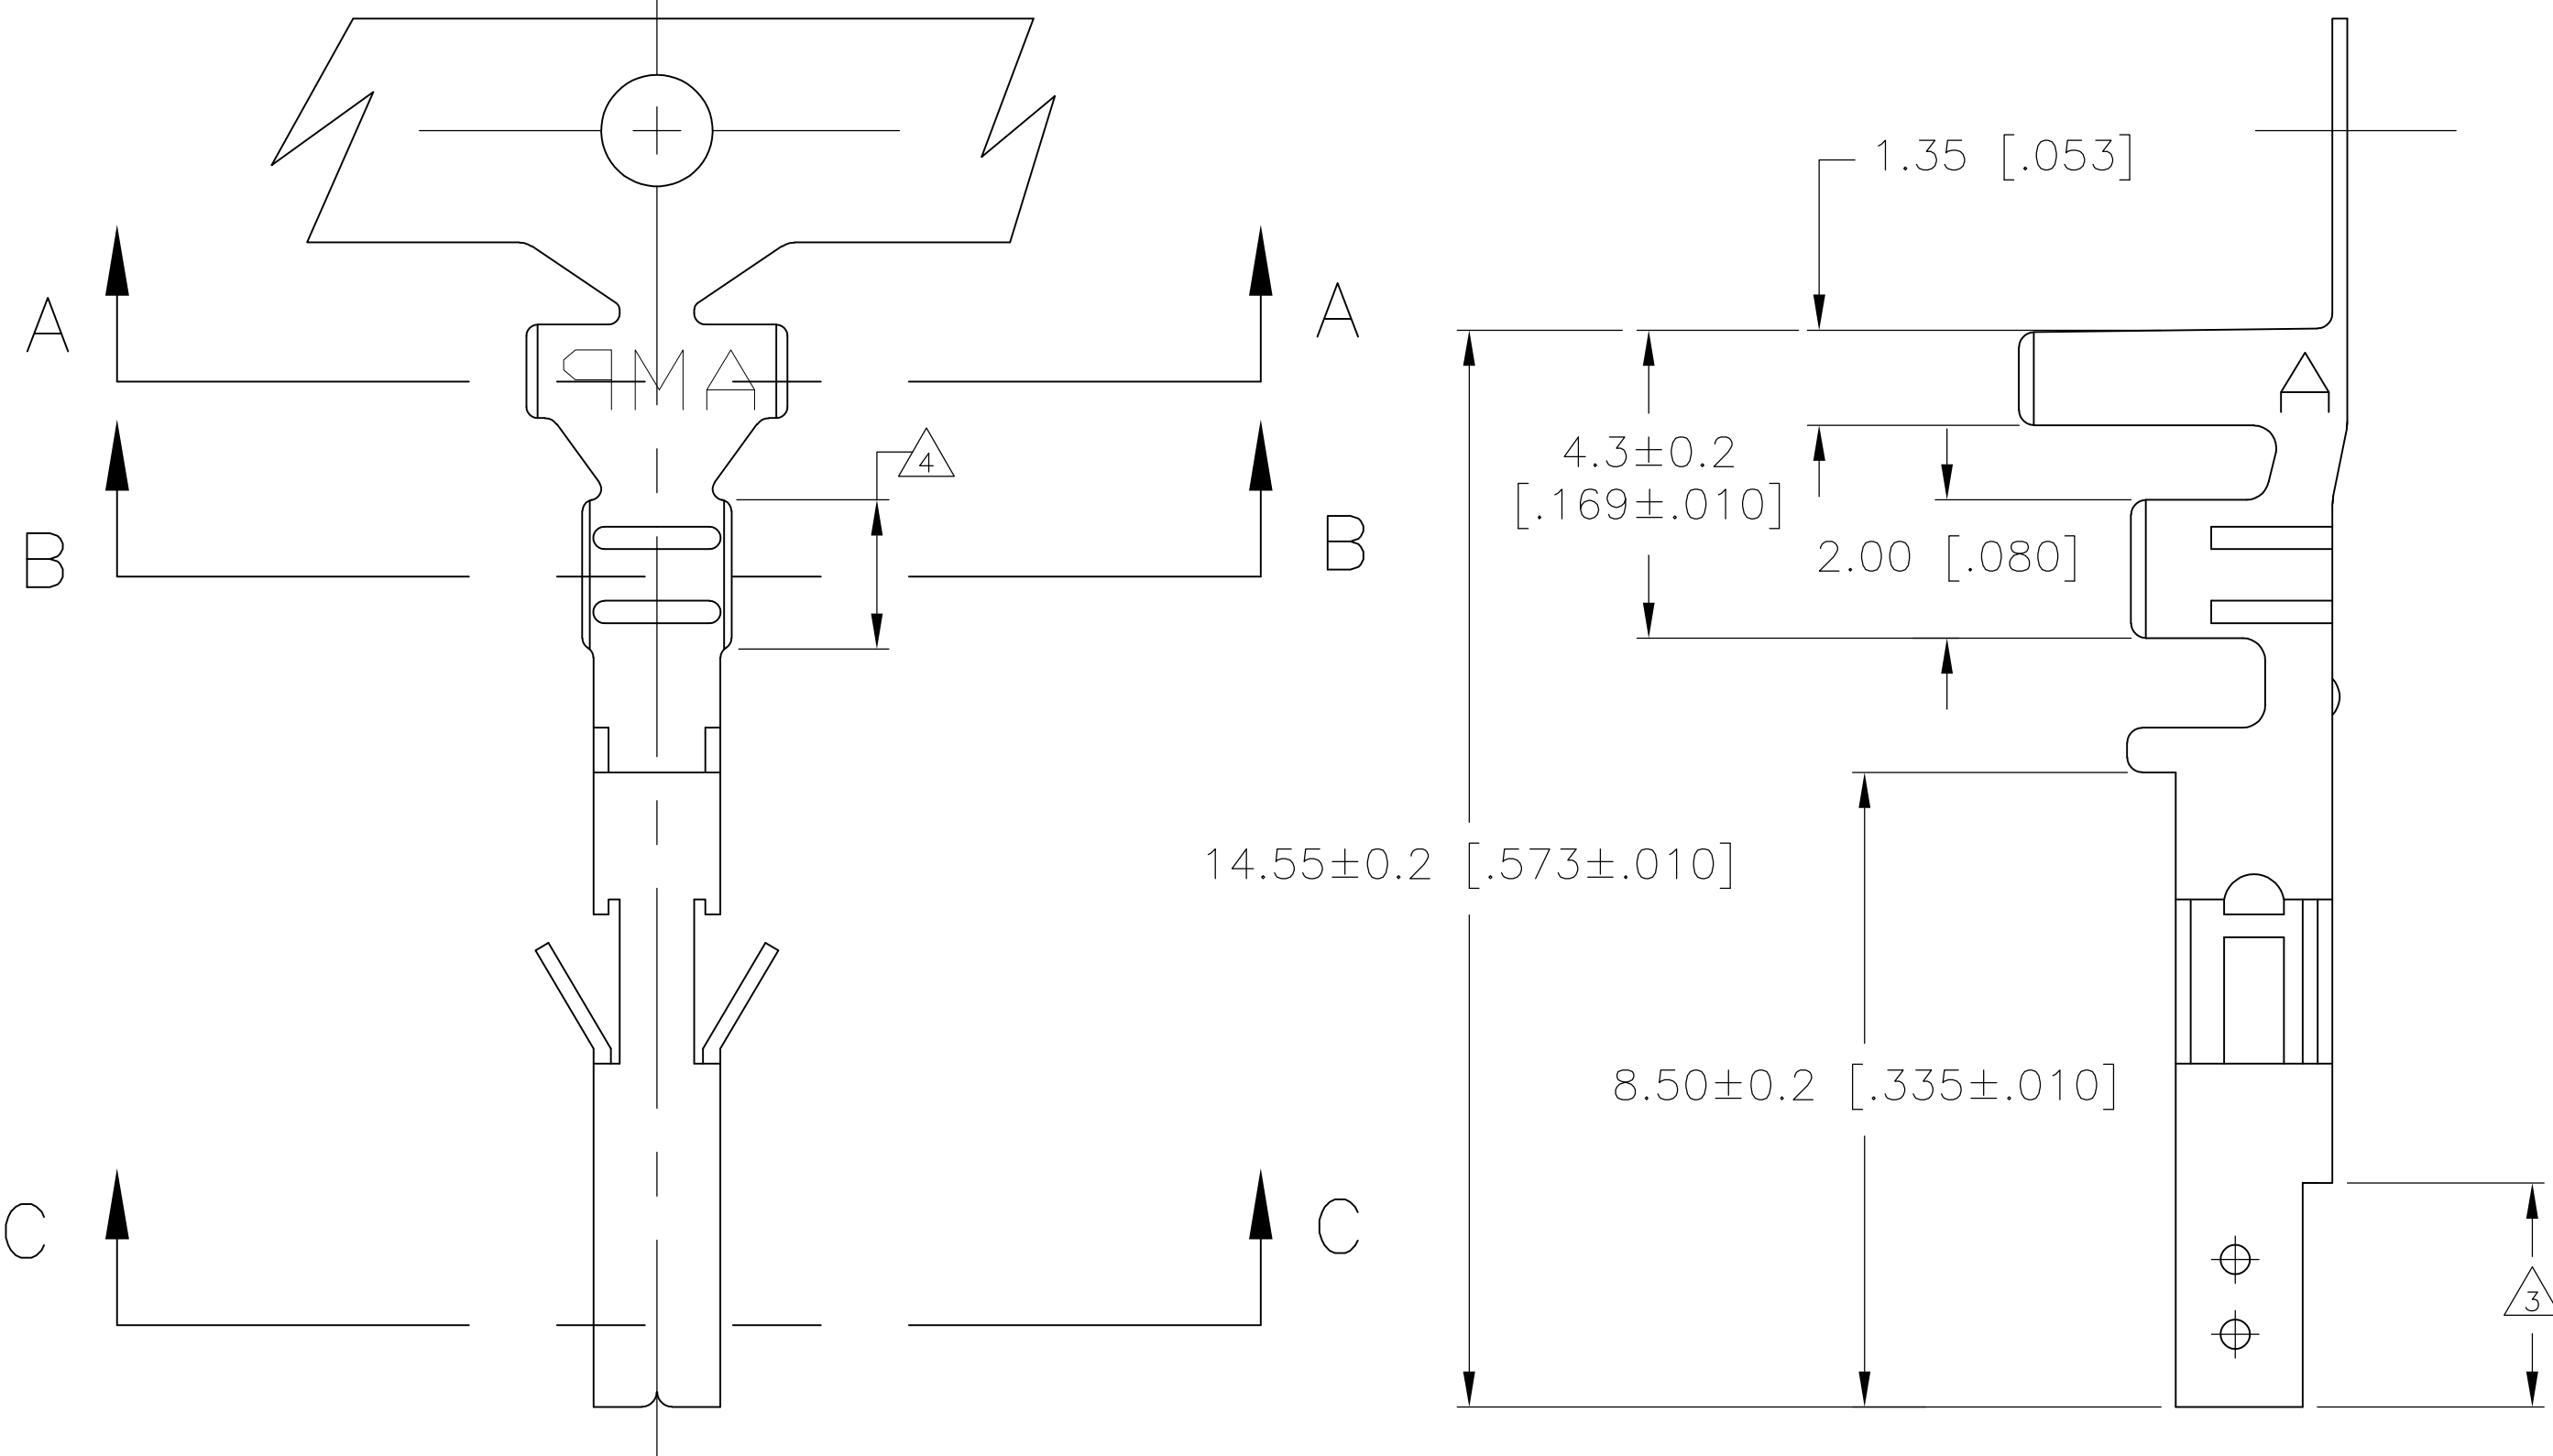
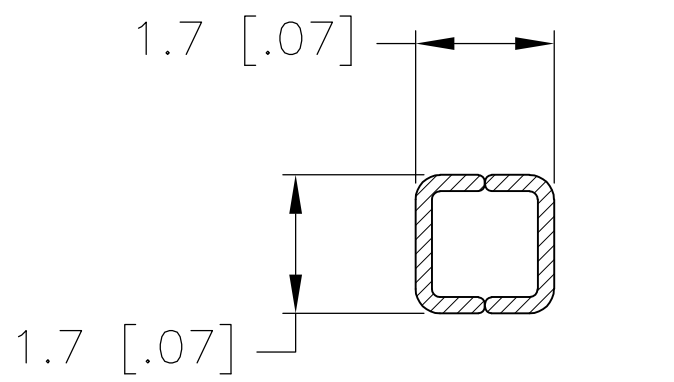


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		H3		REVISED PER ECO-11-004587	11MAR11	RK	HMR
		H4		REVISED PER ECR-13-005387	27MAR13	A.Z	F.M

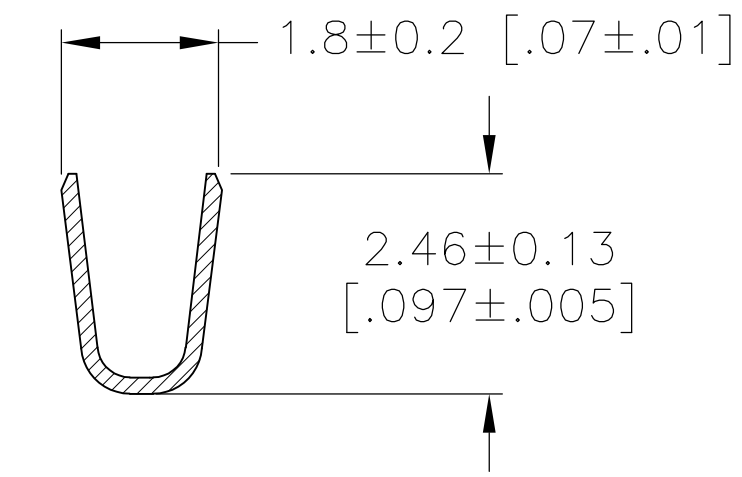

- 1 WIRE RANGE: 0.2-0.82mm² (24-18 AWG).
- 2 INSULATION RANGE: 1.50 - 3.10 DIA.
- 3 FINISH: 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL REQUIRED ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 4 FINISH: 2.54µm MIN PRE-TIN ON ALL SURFACES IN THIS AREA.
- 5 FINISH: 2.54µm MINIMUM PRE-TIN ALL OVER.

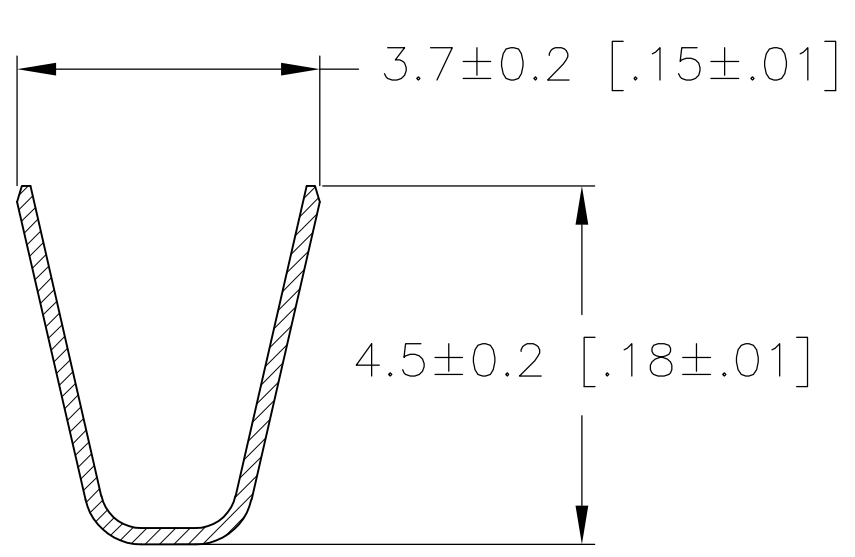

SECTION B-B

SECTION C-C

SECTION A-A

LUBRICANT	794956-1	794956-5
GOLD $\triangle_3 \triangle_4$	PHOS. BRZ.	794956-4
PRE-TIN \triangle_5	PHOS. BRZ.	794956-3
GOLD $\triangle_3 \triangle_4$	BRASS	794956-2
PRE-TIN \triangle_5	BRASS	794956-1
FINISH:	MATERIAL:	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S. HAMM 10-SEP-2001	 TE Connectivity
CHK D. COLEY 10-SEP-2001	
APVD D. COLEY 10-SEP-2001	
PRODUCT SPEC	
APPLICATION SPEC	NAME TERMINAL SOCKET VAL-U-LOK (TM)
MATERIAL	SIZE A2
FINISH	CAGE CODE 00779
	DRAWING NO C=794956
	RESTRICTED TO -
CUSTOMER DRAWING	SCALE NTS
	SHEET 1 of 1
	REV H4