



DUAL-IN-LINE HEADERS

SERIES 162, 862 • GULL WING SHRINK DIP HEADERS & STRIPS, SMT SOLDER TAIL

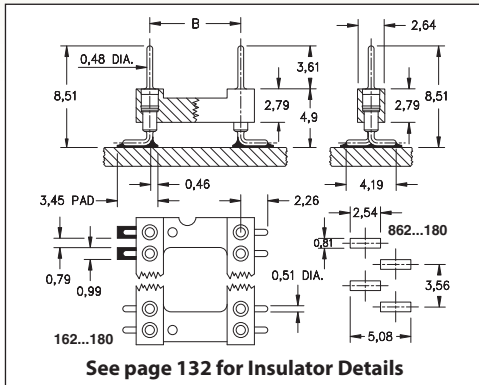

- Surface mount Gull Wing DIP headers & strips for adapters and board stacking applications with 1,78 lead spacing
- Gull wing terminals provide maximum strength and permit easy visual inspection of solder joints
- Series 162 and Series 862 use MM #6218 pins. See page 208 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

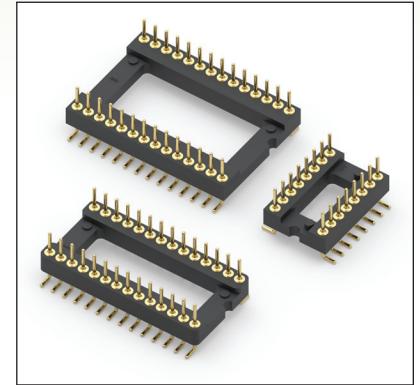

Total number of pins				Quantity per tube	ORDERING INFORMATION	
	A	B	C			
16	14,53	7,62	9,91	35		162-10-316-30-180000
28	25,20	10,16	12,45	20		162-10-428-30-180000
30	26,97	10,16	12,45	18		162-10-430-30-180000
48	42,98	10,16	12,45	12		162-10-448-30-180000
20	18,08	15,24	17,53	28		162-10-620-30-180000
28	25,20	15,24	17,53	20		162-10-628-30-180000
40	35,86	15,24	17,53	14		162-10-640-30-180000
42	37,64	15,24	17,53	13		162-10-642-30-180000
48	42,98	15,24	17,53	12		162-10-648-30-180000
52	46,53	15,24	17,53	11		162-10-652-30-180000
56	50,09	15,24	17,53	10		162-10-656-30-180000
64	57,20	15,24	17,53	9		162-10-664-30-180000
68	60,76	15,24	17,53	8		162-10-668-30-180000
64	57,20	19,05	21,34	8		162-10-764-30-180000
					SINGLE ROW STRIP SOCKET If desired, we will supply any length up to 21 pins.	
21	37,64	---	2,64	---		862-10-021-30-180000
See page 264 for coplanarity information					SPECIFY PLATING CODE XX =	
					Pin Plating 10	
					0,25µm Au	

XX=Plating Code
See Below

RoHS-2
2011/65/EU