

Class II 100W LED Controlgear : PA-1101-48 Series

Product Features

- Universal AC Input
- High Power Factor
- Low Total Harmonic Distortion
- Short Circuit / Open Circuit / Over Voltage / Over Temperature Protections
- Suitable for Dry & Damp Location
- Adjustable Output Current by Dimming Input
- RoHS Compliant

AC Input / DC Output

• AC Input Voltage	100 ~ 305Vac (110 ~ 277Vac)
• AC Input Frequency	47 ~ 63Hz (50-60Hz)
• Max. Input Current @ 110Vac (60Hz)	1.4A
• Min. PF @ 230Vac (50Hz) / Output	0.95
• Min. PF @ 230Vac (50Hz) / Output $\geq 66.5V(70\%)$	0.92
• Min. PF @ 277Vac (60Hz) / Output $\geq 55W$	0.9
• Max. THD @ 120-277Vac / Output at 55W ~ 100W	20%
• Min. Eff. @ 220Vac / 95V Output	88%
• Turn On Delay Time	<1.5 seconds
• DC Output Current	1050mA
• Line Regulation	$\pm 3\%$
• Load Regulation	$\pm 5\%$
• DC Output Voltage Range	52 ~ 95V
• Ripple Current at 220Vac & 95V Output	$\pm 20\%$
• DC Output Isolation	yes

EMC


• EMI	FCC Class A
• Harmonic Current Emissions	EN61000-3-2
• Voltage Fluctuations & Flicker	EN61000-3-3
• Electrostatic Discharge (ESD)	EN61000-4-2 $\pm 4KV$ (Contact), $\pm 8KV$ (Air)
• RS Immunity Test	EN61000-4-3 80MHz ~ 1GHz, 3V/m, 80% AM (1KHz)
• Electrical Fast Transient	EN61000-4-4 $\pm 1KV$ for AC power line, $\pm 0.5KV$ for DC / signal line
• Lighting Surge	EN61000-4-5 $\pm 4KV$ (Com.), $\pm 4KV$ (DiF)
• CS Immunity Test	EN61000-4-6 0.15MHz ~ 80MHz, 3V, 80% AM (1KHz)
• Voltage Dips & Short Interruptions	EN61000-4-11 30%, 25 cycles voltage reduction 100%, 0.5 cycles voltage reduction

Operating Environments / Reliability

• Operating Temperature / Humidity	-40 ~ 60°C / 10 ~ 95% RH
• Storage Temperature / Humidity	-40 ~ 80°C / 10 ~ 95% RH
• Vibration (with shipping container)	1.146Grms / 5~200Hz / six sides 30 minutes / side
• Vibration (operation)	6Grms / 10~1000Hz / X/Y/Z axis 15 minutes / axis
• MTBF Life (Note 3)	50,000 Hrs while $T_c \leq 75^\circ C$ 100,000 Hrs while $T_c \leq 65^\circ C$ 80°C
• Tc	free air convection
• Cooling	meet Class A sound rating
• Sound Level	

Mechanical

• AC Input Terminal	170mm / black(L) & white(N) color / UL1316
• DC Output Terminal	170mm / red(DC +) & blue(DC -) color / UL1316
• Dimming Input Terminal	170mm / purple(dim +) & gray(dim -) color / UL1316
• Weight (typ.)	900g
• Outline Dimension	240mm(L) * 60mm(W) * 34mm(H)

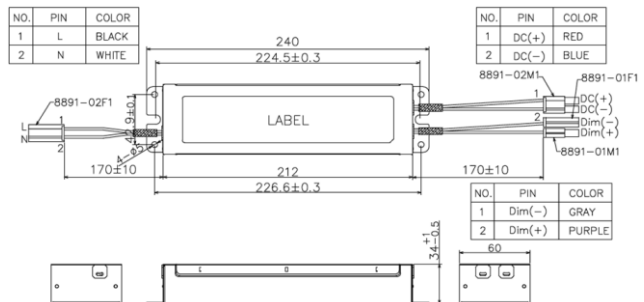

Protections

• OVP or Open Circuit	constant voltage, 117V max.
• SCP	auto recovery
• OTP	output power decrease

Safety / Certifications

• Hi Pot (AC I/P to Case)	3750Vac / 10mA / 60Sec.
• Hi Pot (AC I/P to O/P)	3750Vac / 10mA / 60Sec.
• Insulation (AC I/P to O/P)	>20M Ω , 500Vdc
• Complied with UL8750, 1st Edition	
• Complied with UL60950-1, 2nd Edition	
• Complied with CAN/CSA-C22.2 No.60950-1-07,2nd Edition	



Dimming Input

- Support 2 in 1 Dimming Function
- Resistor Dimming Range (10-100K)
- Voltage Dimming Range (1-10V)
- Resistor Dimming Reference Table

Resistor Dimming	63.4K Ω $\pm 1\%$	48.7K Ω $\pm 1\%$
Output Current	700mA	540mA
Tolerance	$\pm 10\%$	$\pm 10\%$

- Voltage Dimming Reference Table

Voltage Dimming	6.6V	5V
Output Current	700mA	530mA
Tolerance	$\pm 10\%$	$\pm 10\%$

Notes :

- (1) above definition is based on 25°C ambient if not specified
- (2) this LED driver is designed and intended for operating with LED load only
- (3) MTBF evaluation is based on SR-332 method, 115Vac/60Hz, max load
- (4) to measure efficiency after burn-in 30 minutes with full output load
- (5) recommend to install the controlgear inside the enclosure