

5

4

3

2

1

DRAWING NO.

CP892-CUST

REVISIONS

OFFICIAL RELEASE

01

02-20-09

J W B T

Thomas Chow

Description: Jack Assembly Straight Crimp Type 2 Piece BNC, RG59, 62
 Part No: CP892
 Application: For RG59, RG62 Cable
 Crimp Tool: 24-9859P
 Impedance: 50 Ohms
 Frequency Range: 0-2 GHz
 Material: Body: Zinc Nickel plated
 Contact: Phosphor bronze Gold plated
 Insulator: TPX
 Crimp Sleeve: Brass Nickel plated
 RoHS Compliance: Yes
 Technical Detail: Refer to Emerson Document P/N 27-0000



CUSTOMER COPY



TITLE
 JACK ASSEMBLY STRAIGHT CRIMP TYPE
 2 PIECE BNC, RG59, 62

SHEET
 1 OF 1


DRAWING NO.
 CP892-CUST

SIZE
 A

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY IVON.W	DATE 02-20-09
DECIMALS	mm	CHECKED BY BETTY.YU	DATE 02-20-09
X	± 0.5	APPROVED BY THOMAS	DATE 02-20-09
X.X	± 0.3	U/M	mm
X.XX	± 0.1		
ANGLES	± 0.5°		

THIS DRAWING WAS PRODUCED BY COMPUTER,
 DO NOT SCALE DRAWING OR UPDATE MANUALLY.

DIM OUTLINE

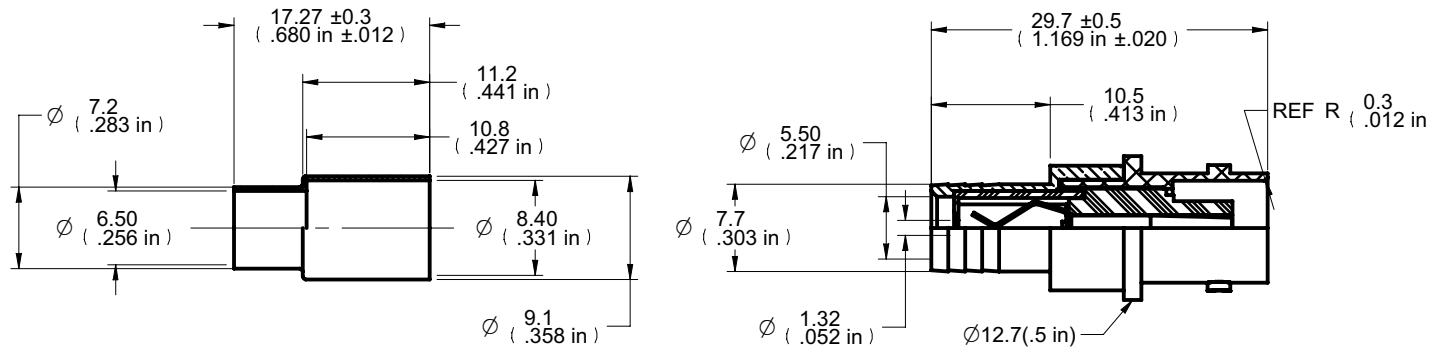

受控 CONTROLLED DOCUMENT					
编号 P/N	CP892-CUST	版本 Rev	01	日期 Rel'd Date	Apr29,09

5

4

3

2

1