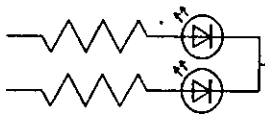
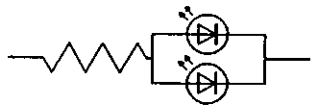






Approved	Checked	Designed	DEVELOPMENT SPECIFICATION					
		T. Tabata	P/N: LNJ311G83RA				TEMPORARY	
T	Y	P	E	Green Light Emitting Diode				
APPLICATION			Indicators					
MATERIAL			InGaAlP					
OUTLINE			Attached					
ABSOLUTE MAXIMUM RATINGS			P	*1 I _{FP}	I _{FDC}	V _R	Topr	Tstg
			55	60	20	4	-30~+85	-40~+100
			mW	mA	mA	V	°C	°C
CONDITION			T _a = 25 ± 3°C					
Test Specification								
I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit		
				Min	Max			
Forward Voltage	V _F	I _F = 10 mA	2.03		2.5	V		
Reverse Leakage Current	I _R	V _R = 4 V			100	μ A		
Luminous Intensity *2	I _O	I _F = 10 mA DC	12	6.4		mcd		
Peak Emission Wavelength	λ _p	I _F = 10 mA DC	575			nm		
Spectral Line Half Width	Δλ	I _F = 10 mA DC	15			nm		
<p>*1. The Condition of I_{FP} is duty 10 % , Pulse width 1 ms</p> <p>*2. Tolerance of luminous intensity: ±20%.</p> <p>NOTE</p> <p>★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.</p> <p>★2. Soldering conditions.....Refer to Handling note.</p> <p>★3. Compositions of the lead Cu/Ni/Au plating</p> <p>★4. Beware of destruction by static electricity in handling the LED.</p> <p>★5. Circuit to operate LED.</p>								
						(A) Recommended circuit.		
						(B) The difference of brightness between the LED could be found due to the V _F characteristics of each LED.		
Oct. 18. 2001								

Approved	Checked	Designed
		T. Takata

DEVELOPMENT SPECIFICATION

P/N: LNJ311G83RA

TEMPORARY

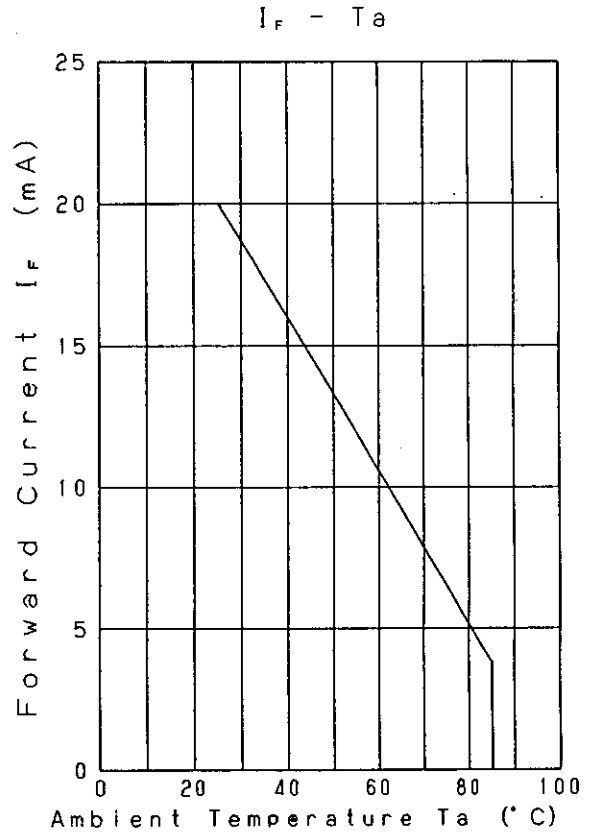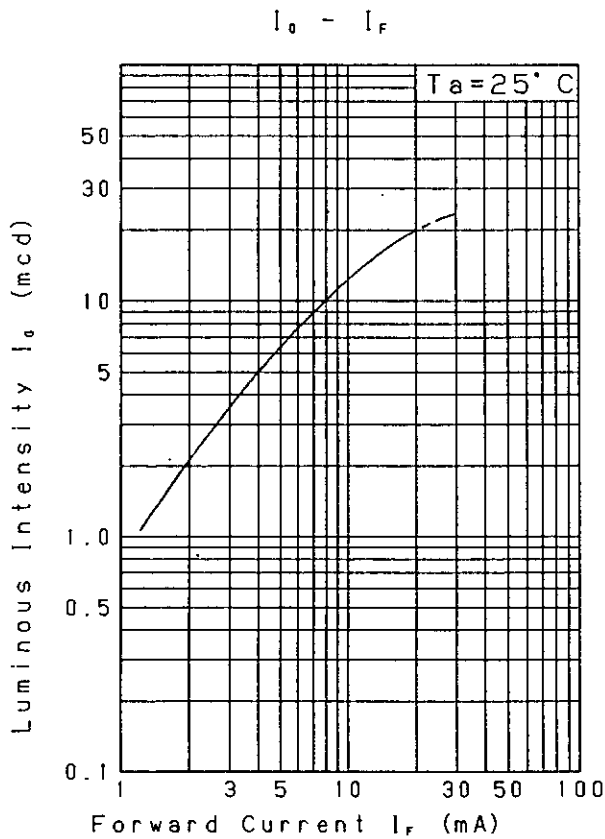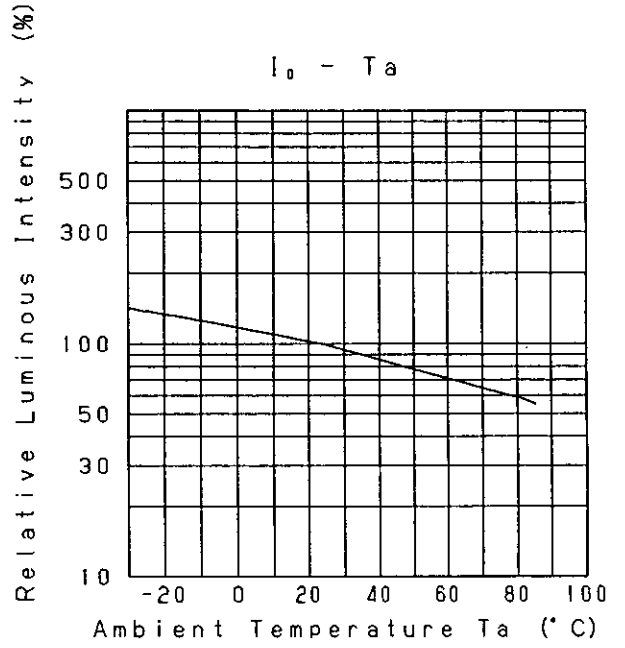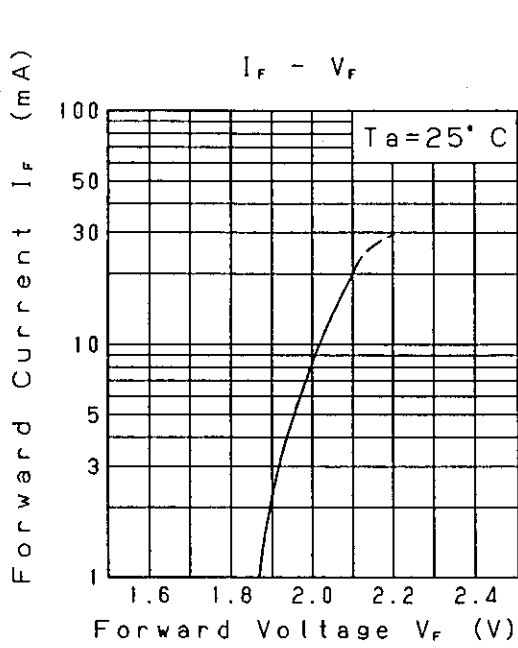

Oct.18.2001


Approved	Checked	Designed
		T. Takata

DEVELOPMENT SPECIFICATION


P/N: LNJ311G83RA

TEMPORARY

Relative Luminous Intensity
Wavelength Characteristics




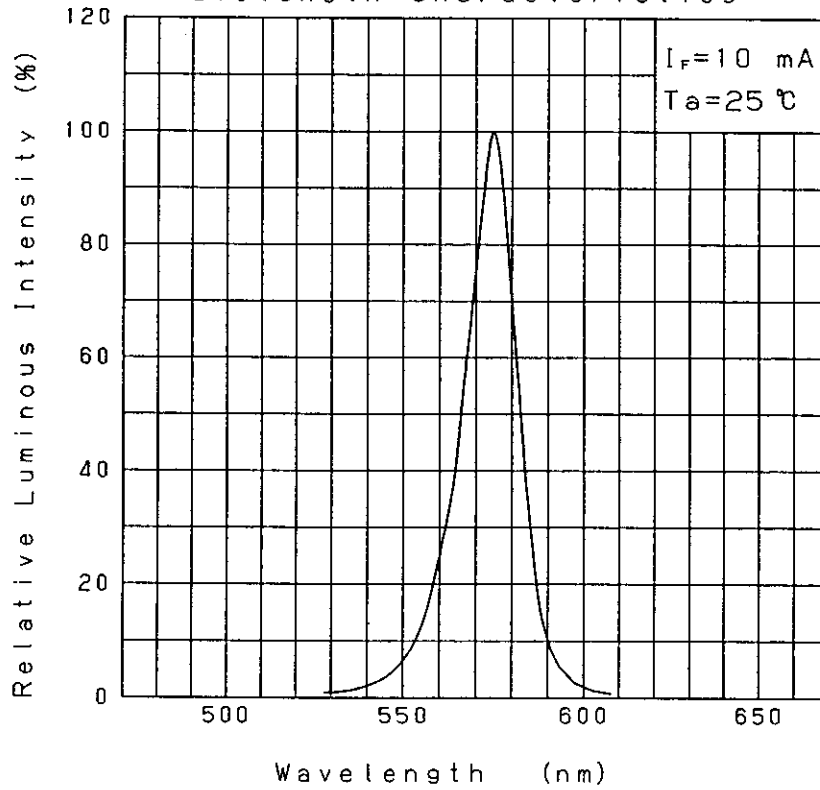


Directive Characteristics

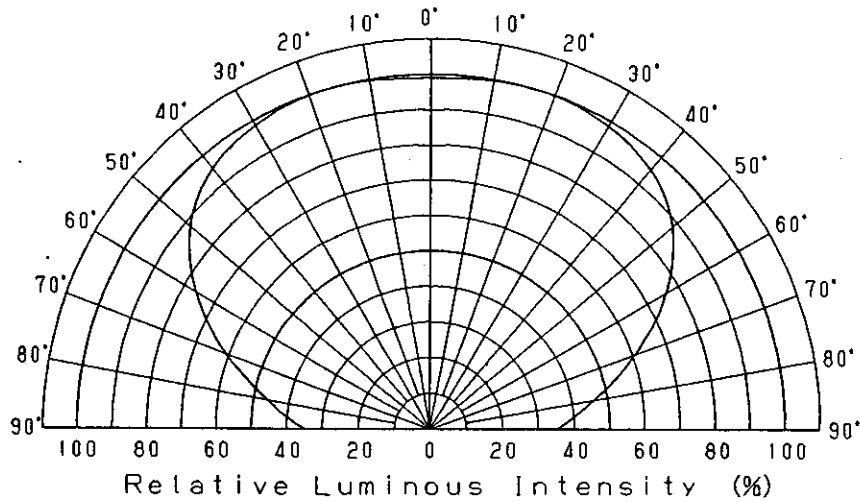

Oct. 18. 2001

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION (OUTLINE)		
<i>H. Yama</i>	<i>T. Shiba</i>	<i>T. Tabata</i>		P/N: _____	

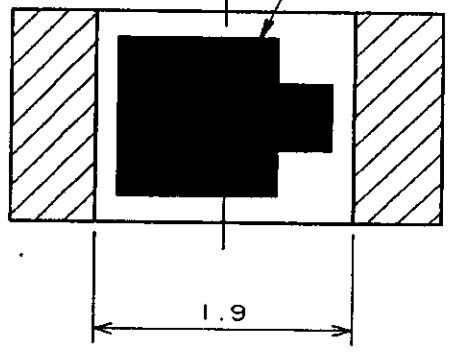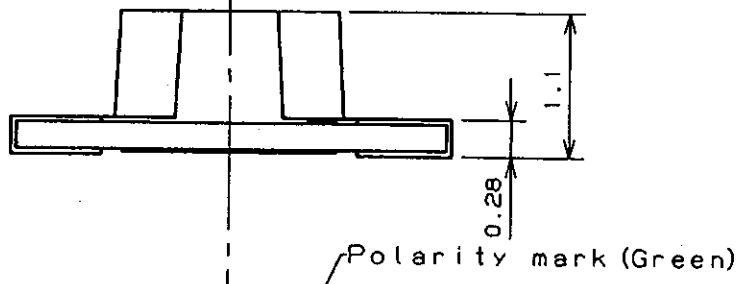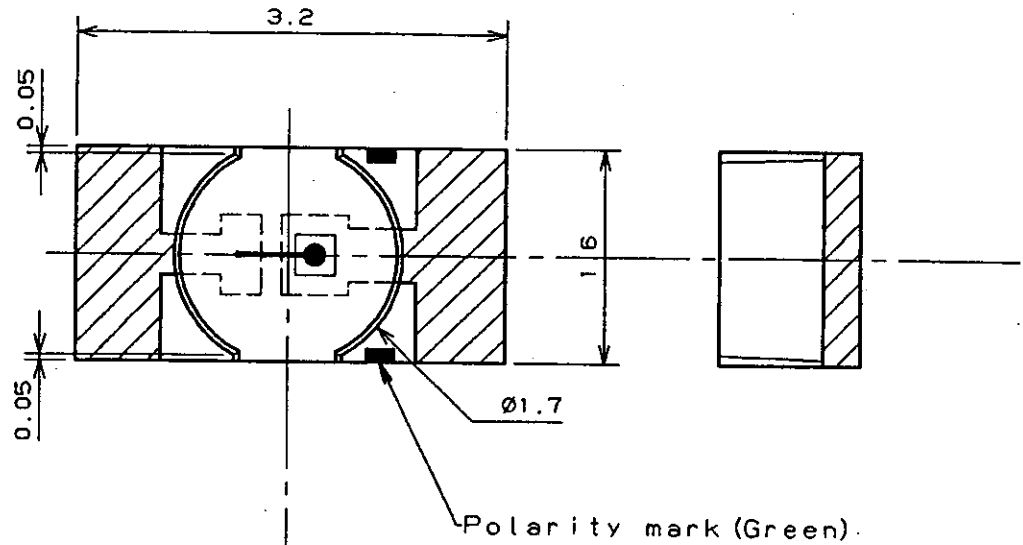

(NOTE)
 1. Unit: mm
 2. Tolerance unless specified is ± 0.15 .
 3. indicate Au terminal.

Jan. 14, 1989			
---------------	--	--	--