




UNIT:mm

2000±30mm

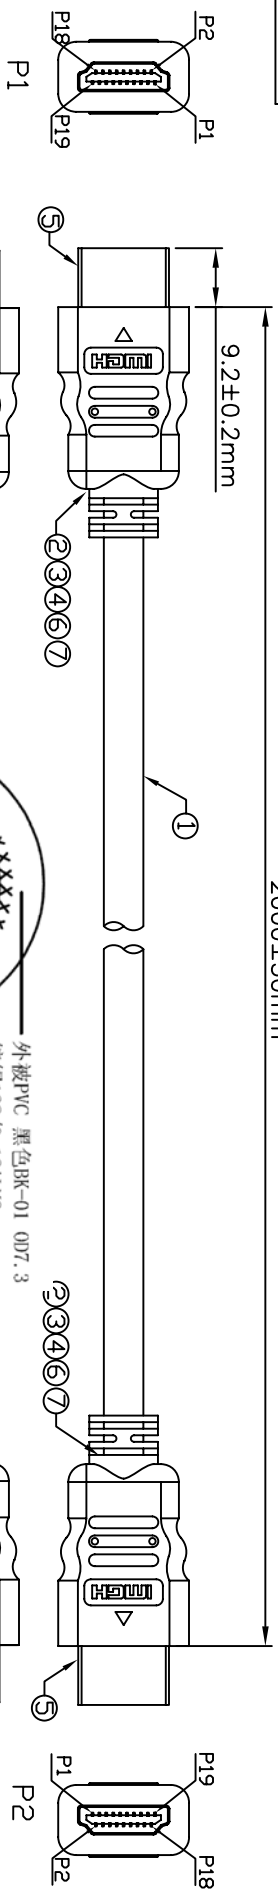


HDMI 19P/M MOLDING TYPE
 INNER MOLD NO.:HJ-CT-091
 OUTER MOLD NO.:HJ-CT-092/093
 (MOULD NO.)



HDMI 19P/M MOLDING TYPE
 INNER MOLD NO.:HJ-CT-091
 OUTER MOLD NO.:HJ-CT-092/093
 (MOULD NO.)

PIN ASSIGNMENT

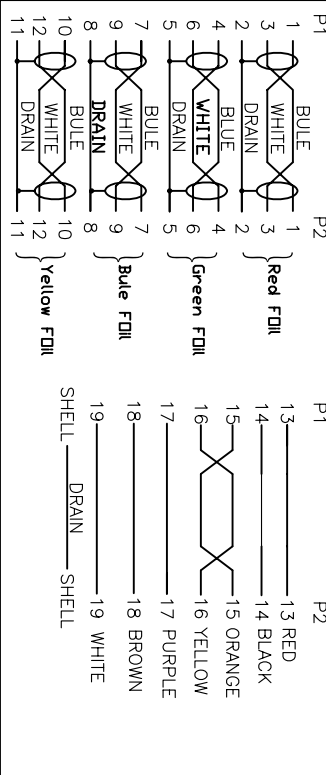

- ELECTRICAL TEST
 - 100% open short & miss wire test
 - Insulation resistance:DC/300V 5Mohm(Min)
 - Contact resistance:≤3ohm Max
- HDTV-DVD TEST:1080P (高清电视测试: 1080P)
- RoHS compliant

⑦	OUT JACKET	16g	OUTER MOLD:45P PVC COLOR:BLACK
⑥	IN JACKET	8g	INNER MOLD:CLEAR LDPE
⑤	CONN	2	HDMI 19P/M SOLDER STYLE SHORT BODY PIN 3U" SHELL-PLATED GOLD INSULATION BLACK
④	TUBE	2	HEAT SHRINK TUBE CLEAR ODO.8*L=20mm.
③	TUBE	10	HEAT SHRINK TUBE CLEAR ODO.2*L=6mm.
②	TUBE	10	HEAT SHRINK TUBE BLACK ODO.8*L=9mm.
①	CABLE	1	28#[1/0.32BC+FPPE ID0.95*1P+D 1/0.32BC+HDPE ID0.6+AL]*4P+(1/0.32BC+HDPE ID0.70)*1P+(1/0.32BC+HDPE ID0.70)*5C+AL+D 1/0.32BC+B 28#[/0.12ALMG+PVC BLACK ODT.3MM

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	Zhonghs	DRAWING NO.	VG/LJQ-094-004
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	740-10010-00200
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITION	A/0	PROJECTION	