


## Specification Sheet

Part Number: 553-50001

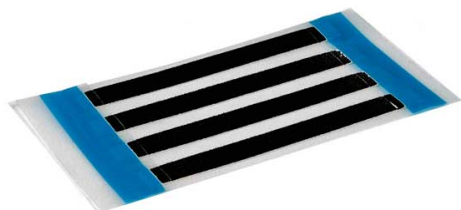

Heat Shrink Labels, Single Side, Unslit, .125" (3.17mm), PO-X, Black, 250/box

**Article Number**

553-50001

**Type**

HST3-1BK

**Color**

Black (BK)

**Features & Benefits**

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

**Quantity Per**

box

**Product Description**

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

<b>Short Description</b>	Heat Shrink Labels, Single Side, Unslit, .125" (3.17mm), PO-X, Black, 250/box
<b>Global Part Name</b>	HST3-1BK-PO-X-BK
<b>Variant</b>	Thin-Wall
<b>Width W (Imperial)</b>	1.9
<b>Width W (Metric)</b>	48.26
<b>Thickness T (Imperial)</b>	.003
<b>Thickness T (Metric)</b>	.0762
<b>Height H (Imperial)</b>	0.235
<b>Height H (Metric)</b>	5.69
<b>Width of Liner (Metric)</b>	76.2
<b>Width of Liner (imperial)</b>	3.0
<b>Outside Diameter OD(Imperial)</b>	0.125
<b>Outside Diameter OD(metric)</b>	3.2
<b>Outside Diameter Max(Imperial)</b>	0.125
<b>Outside Diameter Max (metric)</b>	3.2
<b>Wall Thickness WT (Imperial)</b>	0.0209
<b>Wall Thickness WT (Metric)</b>	0.53

<b>Material</b>	Polyolefin, cross-linked (PO-X)
-----------------	---------------------------------

**Material Shortcut** PO-X

<b>Adhesive</b>	Acrylic
-----------------	---------

SAE-AS81531

**US MIL SPEC**

AMS-DTL-23053/5 Class 1 and 3

MIL-STD-202G Method 215K

**Flammability**

UL 224 VW-1

**Halogen free**

No

**Adhesive Operating Temperature**

-40°F to +248°F (-40°C to +120°C)

**Operating Temperature (Metric)**

-67°F to +275°F (-55°C to +135°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

UL 224 125 °C 600V

<b>Package Quantity(Imperial)</b>	250
-----------------------------------	-----

**Package Quantity (Metric)** 250

<b>Customs Number</b>	3926909987
-----------------------	------------

**Content Unit(BMEcat)**

pack

**Weight (Metric)**

0.294

**Weight (Imperial)**

0.64